



**The K40
Guarantee:**

30-day money-back

performance guarantee.
Your new K40 must transmit farther and receive more clearly than the antenna it replaces or simply return it within 30 days with proof-of-purchase for a complete product credit from the authorized K40 dealer who installed it.


5-year quality guarantee.

Materials and workmanship are guaranteed for a full 5 years from date of purchase. Any part that fails to perform satisfactorily within that period will be replaced absolutely free with proof-of-purchase.

K40 Electronics

1500 Executive Drive, Elgin, IL 60123, (847) 888-7200

4380-1 1/96

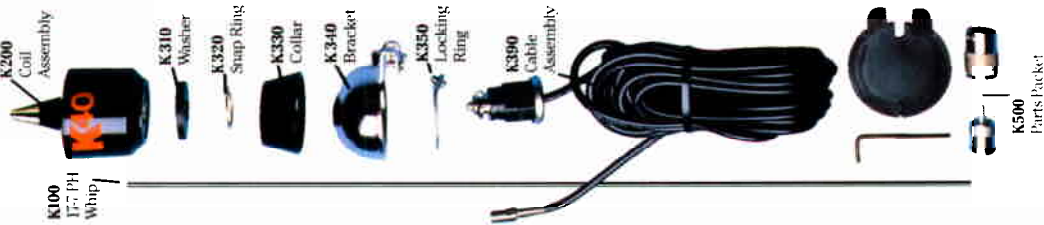

Easy to mount.

TRUNK-LIP MOUNT

1. Turn base assembly upside-down and loosen set-screw on locking ring so collar slides (without slipping) on bracket.
2. Place base assembly on trunk lip using enclosed base gasket and slide collar to vertical position when trunk is closed.
3. Remove base, turn upside-down and tighten set-screw on locking ring to set angle.
4. Open trunk, replace base on trunk lip, and tighten two set-screws on bracket.
5. Close trunk and attach coil and whip.

THROUGH-ROOF MOUNT

1. Remove base washer.
2. Loosen set-screw on locking plate.
3. Remove snap ring.
4. Slide off collar and remove bracket.
5. Drill $\frac{7}{8}$ " hole through roof.
6. Insert base assembly into hole from inside vehicle.
7. Slip collar back on assembly, replace snap ring and gasket.
8. Tighten locking ring set-screw from inside vehicle.
9. Attach coil and whip.

Optional Magmount affixes the K40 Antenna to any metal or vinyl-covered surface on virtually any vehicle. Bracket includes 120-pound pull, eight-pole magnet and all necessary hardware. Ask your dealer for details.




Quarter-turn quick release for easy removal of coil and whip.




Easy to tune.

1. Connect SWR meter between antenna and radio.
 2. Measure SWR of first channel (No. 1) and SWR of last channel (23 or 40).
 3. Raise or lower whip so both SWR's are equal. If last channel SWR is too high, lower whip. If last channel SWR is too low, raise whip.
 4. Adjust in increments of $\frac{1}{8}$ ".
- REMEMBER:** Keep doors closed and press transmit button each time you measure SWR.

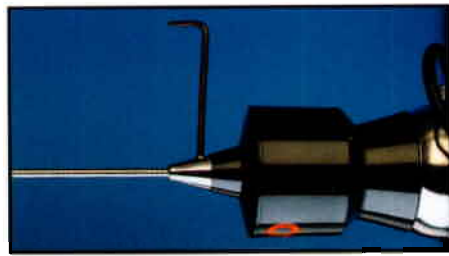

Computer-designed, machine-assembled for clearly superior performance.

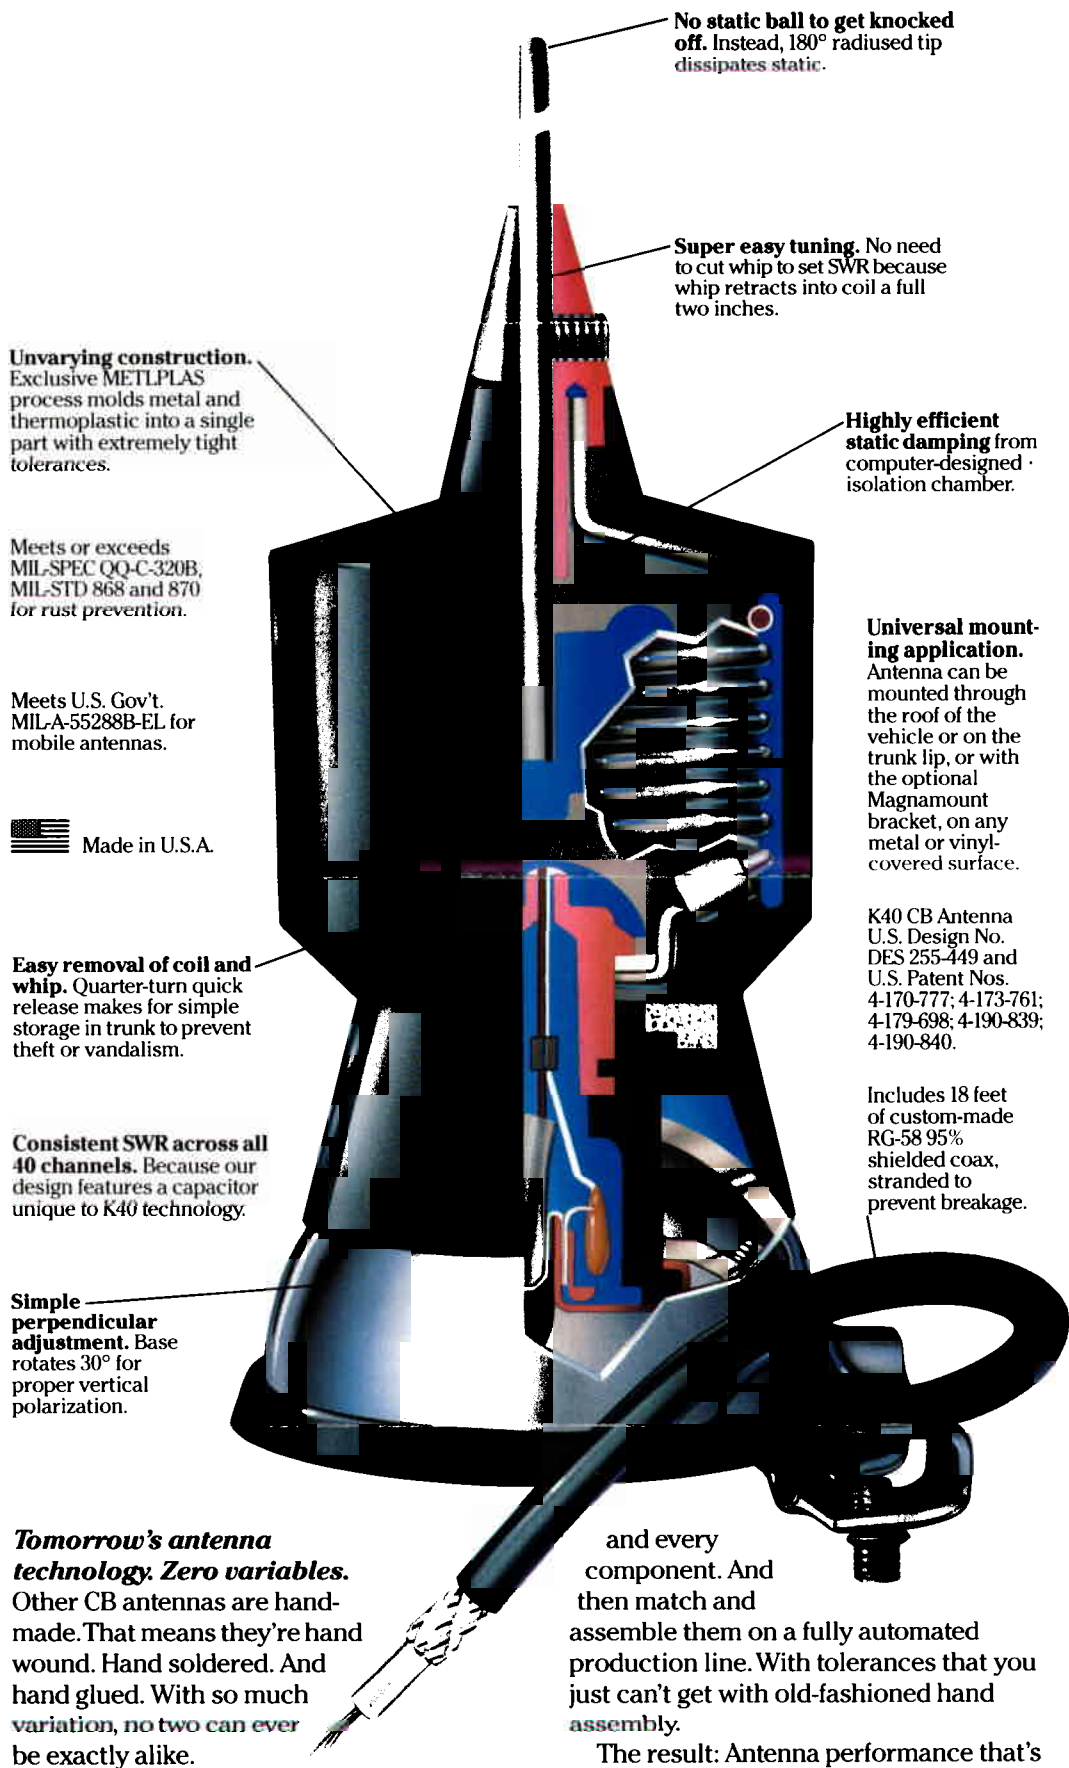

No static ball to get knocked off. Instead, 180° radiused tip dissipates static.

Super easy tuning. No need to cut whip to set SWR because whip retracts into coil a full two inches.

Unvarying construction. Exclusive METLPLAS process molds metal and thermoplastic into a single part with extremely tight tolerances.

Highly efficient static damping from computer-designed isolation chamber.

Meets or exceeds MIL-SPEC QQ-C-320B, MIL-STD 868 and 870 for rust prevention.

Meets U.S. Gov't. MIL-A-55288B-EL for mobile antennas.



Made in U.S.A.

Universal mounting application. Antenna can be mounted through the roof of the vehicle or on the trunk lip, or with the optional Magnamount bracket, on any metal or vinyl-covered surface.

Easy removal of coil and whip. Quarter-turn quick release makes for simple storage in trunk to prevent theft or vandalism.

K40 CB Antenna
U.S. Design No. DES 255-449 and
U.S. Patent Nos. 4-170-777; 4-173-761;
4-179-698; 4-190-839;
4-190-840.

Consistent SWR across all 40 channels. Because our design features a capacitor unique to K40 technology.

Includes 18 feet of custom-made RG-58 95% shielded coax, stranded to prevent breakage.

Simple perpendicular adjustment. Base rotates 30° for proper vertical polarization.

Tomorrow's antenna technology. Zero variables. Other CB antennas are hand-made. That means they're hand wound. Hand soldered. And hand glued. With so much variation, no two can ever be exactly alike.

But every K40 is exactly the same. Unvarying. Totally consistent. In materials, construction, and—most importantly—in performance.

That's because we computer design each

and every component. And then match and assemble them on a fully automated production line. With tolerances that you just can't get with old-fashioned hand assembly.

The result: Antenna performance that's far and away the best you can buy. At any price. And that means whatever road you travel, you can use your K40 with that wonderful feeling of supreme confidence. Guaranteed.