



Es'hail-2 Oscar 100 Dual Band Patch Antenna

Written by PJM on 21 February 2019

Simple dual band dish feed for Es'hail-2 / QO-100

Mike Willis G0MJW, Remco den Besten PA3FYM, Paul Marsh M0EYT February 2019

Abstract




sy to build 2.4 and 10 GHz dish feed, using commonly available materials, for il-2 / QO-100 deployment is presented. The feed consists of a LHCP patch antenna for 2.4GHz and a waveguide feed for 10 GHz, to be placed in the focal point of commonly available and cheap offset satellite TV dishes with f/D's of around 0.6.

Design

The 2.4 - 10 GHz dual band feed was designed and modelled with CST Studio (student edition) and comprises of a LHCP patch feed with a circular waveguide passing through it. Because the (free) student version of CST Suite has limitations there initially was some concern if the modelled results could be realised in practice. Modelling and optimising the patch feed meant adjusting the patch size, patch spacing, cut-out size and feed point location. All variables were iterated towards the final dimensions to let the patch generate LHCP and a sufficient match to $Z = 50\Omega$ resistive at 2400MHz.


Picture below depicts the final impedance response (red line) on a Smith Chart.

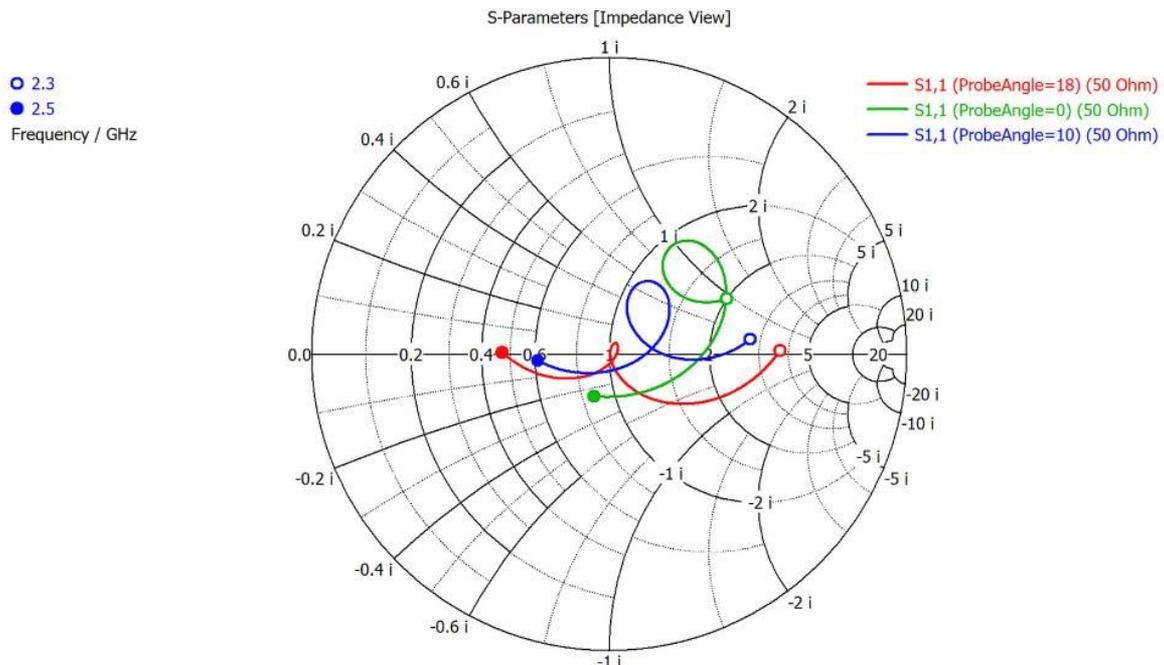

Getting good LHCP depends on two resonances being properly set up through the geometry of the patch. The patch may be considered as two antennas having resonant frequencies lagging and heading 45° in phase to produce the desired 90° phase difference at the design frequency (2400 MHz).

Dimensions


 picture below shows the dimensions of the dual band feed. It contains a 105 mm diameter circular reflector but a square reflector with cropped edges (25mm) is also suitable. The patch itself is square with two opposite corners cropped. Material is ca. 1mm thick copper or brass plate. The waveguide is made from standard copper 'plumbing' tube (22 OD / 20 mm ID), ca. 120mm long and protrudes ca. 5mm above the patch surface. The centre (green dot) of the construction is marked as (X=0,Y=0) and the feed point position (red dot) is at (X=8mm, Y=28mm), thus 8mm right and 28mm above the centre.

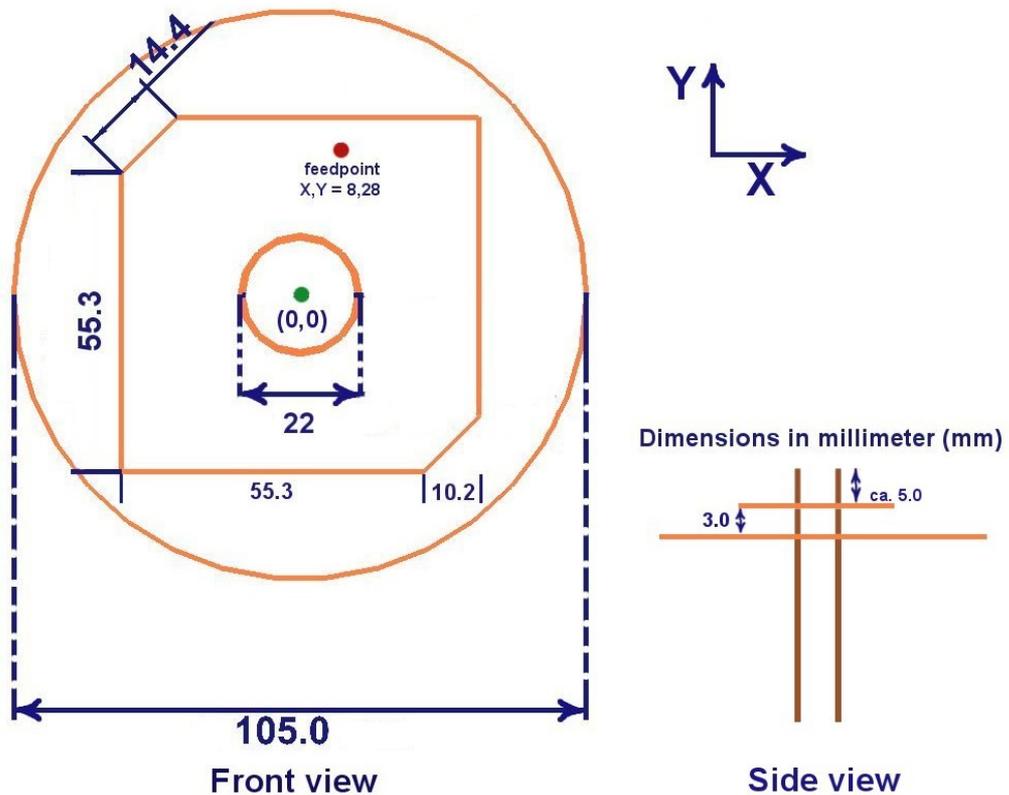


Construction

Cut the material according to the dimensions given above. Drill or punch 22mm holes in the respective centres of the plates. Cut the waveguide with a pipe cutter and deburr the ends. Position the plates onto the waveguide so that they are centred. Drill a 1 mm diameter hole through both plates at the feed point position (X=8mm, Y=28mm). Mark out, drill and tap the mounting holes for your chosen connector on the reflector


Prior to soldering, degrease all parts with hot soapy water and clean with Scotchbrite or wire wool to ensure the surface will solder perfectly. First solder the reflector on the waveguide, see the picture below. Keep the plate aligned at 90° to the 22mm tube at the right place (e.g. with an olive or clamp ring under-neath), hold

the assembly in a vice, taking care not to crush the copper tubing and ensure 9 -
mm of 22mm tube is protruding above the reflector. Don't use excessive solder.
Flux paste will aid the process.

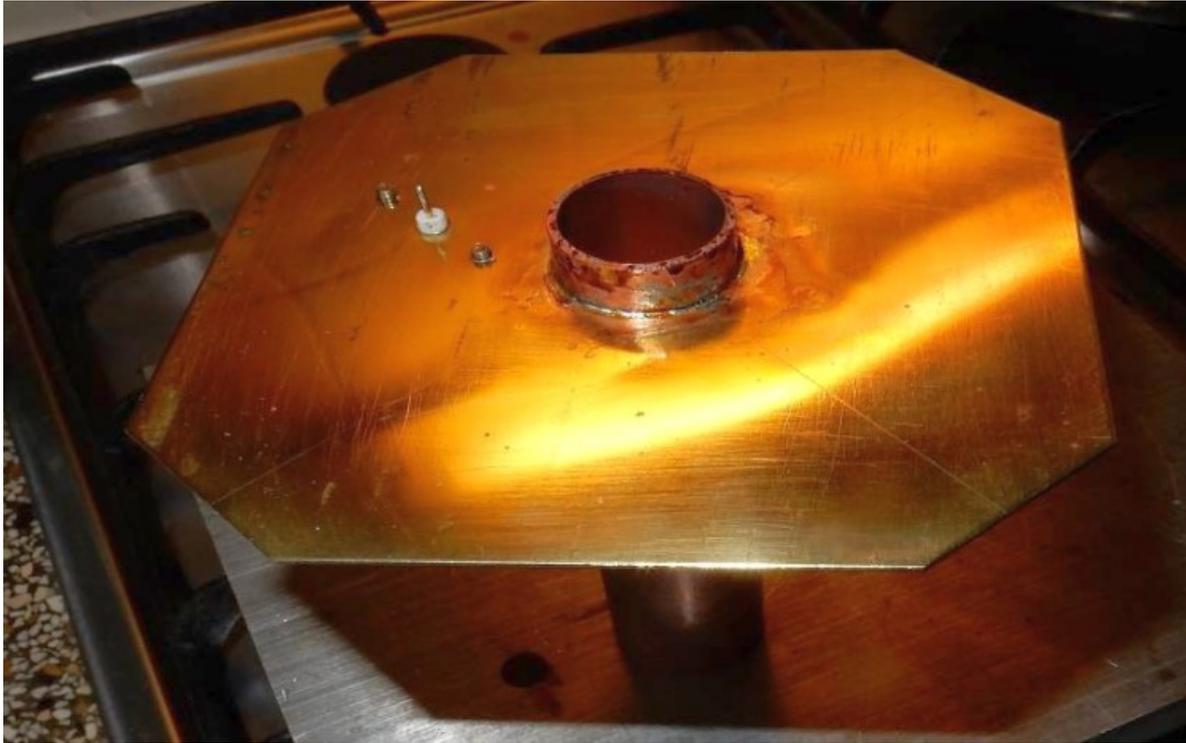



Next, attach the feed connector. Connector mounting screws should not protrude above the reflector surface or they will act as unwanted tuning screws. If they protrude, grind them down or they will affect the matching of the patch.

Finally, press the patch itself around the waveguide and use 3mm thick metal spacers to solder the patch and feed point, see the picture below. It is important to get the spacing accurate. Aim for 3.0mm, not "about 3mm".

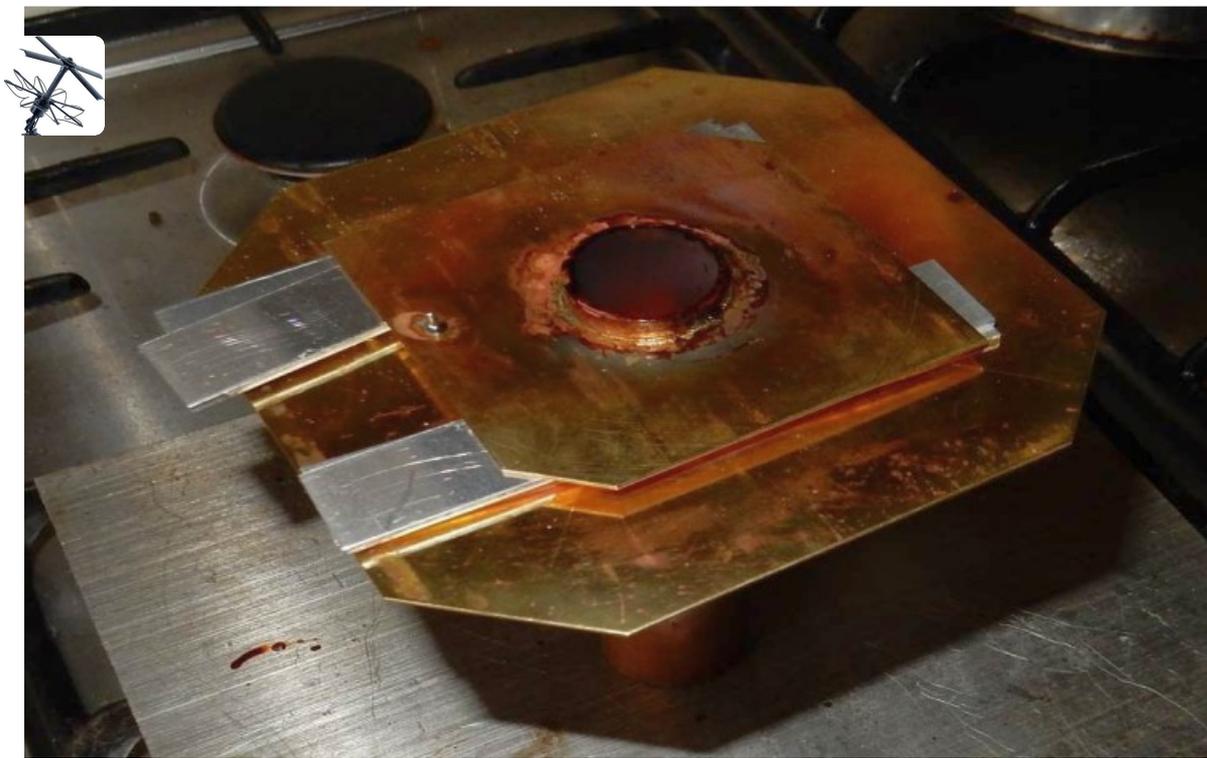

Clean and deflux the feed and your result should look like the examples below.

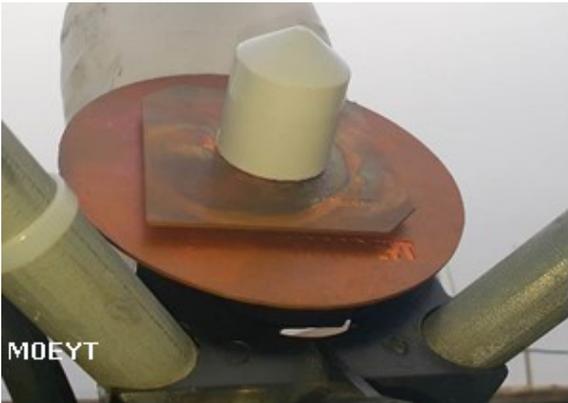

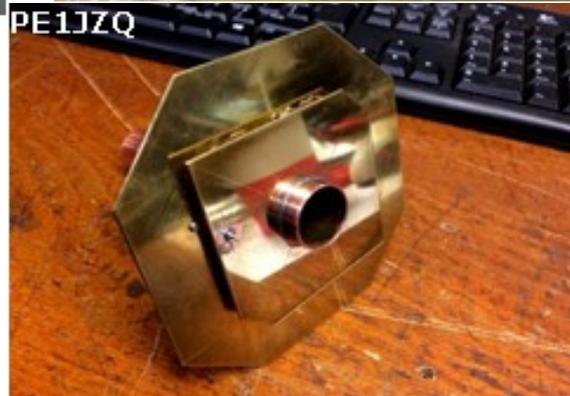

Mounting the LNB





How to mount the LNB to the waveguide depends on its inner or outer diameter. If the LNB has a horn (like most do) this horn has to be cut off. LNB's having an outer diameter of 20mm are also available. Using some sandpaper it can be squeezed into the waveguide. Most LNB's have a somewhat larger outer diameter. In these cases the waveguide internal diameter of the copper pipe has to be increased (e.g. swaged out on a lathe) prior to soldering the plates. As alternatives a 22 – 22 mm solder 'socks' or compression couplers can be used, or even another olive/clamp ring, see images below.

Adjustments

If the patch is made precisely enough it should show two resonances just below and above 2400MHz. When the overall maximum return loss is too low or too high in frequency, bending the distances of the patch corners from or to the reflector



plate helps centering the maximum return loss around 2400MHz. In practice, there will probably be only a single shallow dip of around 20 dB. Any higher is suspicious as it implies that both resonances are the same frequency, which will not give good circular polarization. The pictures below shows modelled return loss and the measured return loss of a sample antenna.

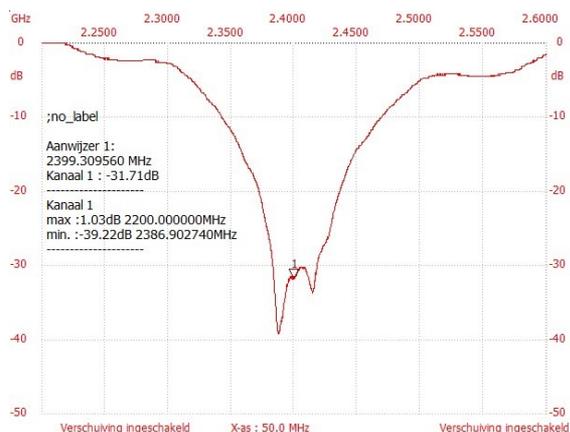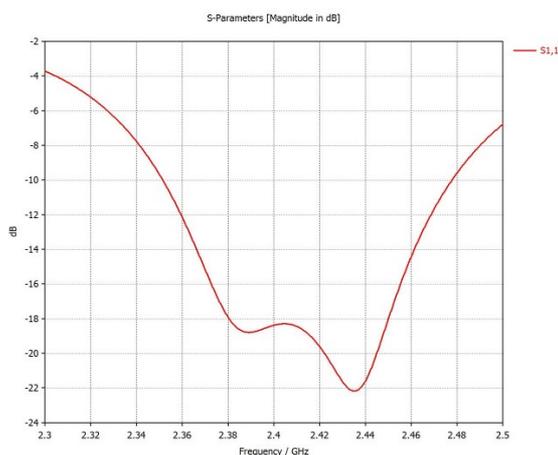


Waveguide 10 GHz dielectric lens

The waveguide alone over illuminates a standard $f/D = 0.6$ offset dish and also presents a poor match. In order to illuminate properly most LNB's have horns. However, there are LNB's on the market destined to be placed close to each other so that with multiple LNB's multiple satellites can be received simultaneously using a single dish. These LNB's are known as 'rocket LNB's' because their shape resembles a rocket. These LNB's use a dielectric lens and are useful in this application as they do not disturb the 2.4 GHz patch. They are complex structures designed to optimally illuminate the dish. Options are to buy a (cheap) rocket LNB and use the lens only, or to buy a PLL rocket LNB (rare).



Another approach is to produce a lens yourself on a lathe. The pictures below show an experimental lens, made from 20mm diameter Nylon-6 (PolyAmide 6, or PA6). The final dimensions of the lens is still work in progress.

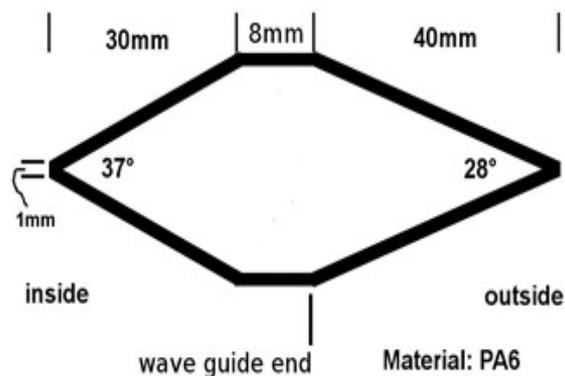

Conclusion

One month after the first successful prototypes were built and measured, almost 100 of these dual band dish feeds have been sent out and/or made by a large diversity of persons. The design is reproducible and strikingly simple. Although precision is the main virtue, this dual band feed already serves as the de facto standard for a single QO-100 dish. The modelled -10 dB opening angle of the 2.4 GHz LHCP patch amounts to ca. 105° and illuminates standard/consumer satellite dishes with f/D's of around 0.6 (which require ca. 90°) sufficiently, bearing in mind the patch is only used to transmit.

Appendix / hints and tips

Connectors Use panel mounts with flanges and PTFE (teflon) dielectric as depicted in Figure 13. Don't use chassis connectors which protrude the reflector plate (too much).



Figure 13 - Examples of suitable panel mount flanges

Radomes We leave it up to the builders creative imagination how to construct a suitable radome to protect the feed against weather influences. It is important that the (plastic) material does not heat up in a microwave oven. Test before usage! Figure 14 shows an example.



Figure 14 - A more weatherproof setup

Materials Copper and brass give similar results and performance. Double sided

FR4 PCB has not been tried (yet).



ng feed/phase point When the feedpoint of the waveguide is in the optimal position (tweak the dual band feed for maximum signal or SNR listen to the QO-100 beacon on 10489.550 MHz) the 2.4 GHz LHCP patch is also in the focal point of the dish. A convenient method to optimise the feed position is to use a SDR and maxi-mise the transponder noise floor by looking at the waterfall.

Leave a comment

[Please login to leave a comment.](#)

© 2000 - 2018 UHF-
satcom.com

[Copyright / Legal
Disclosure](#)

Please support this site

Donate with 

Links

[#Hearsat IRC chat
details](#)

[Yahoo Amateur DSN
group](#)

[Yahoo UHF-satcom
group](#)

[Hearsat mail list](#)

Made by [tynet.eu](#)
with the help of a lot of
caffeine