



<p align="center">TEST REPORT</p> <p align="center">EN 60950-1</p> <p align="center">Safety of information technology equipment</p> <p align="center">Part 1-General requirements</p>	
Report reference No	R2XM161028057-03
Compiled by (+ signature)	Eric Ding 
Approved by (+ signature)	Robin He 
Date of issue	2016-11-17
Testing laboratory	Bay Area Compliance Laboratories Corp. (Dongguan)
Address	No.69,Pulongcun, Puxinhu Industrial Zone, Tangxia Town Dongguan, Guangdong 523719, CHINA
Testing location	As above
Applicant's name	Quanzhou Wouxun Electronics Co., Ltd.
Address	No.928 Nanhuan Road, Jiangnan High Technology Industry Park, Quanzhou, Fujian, China
Manufacturer's name.....	Quanzhou Wouxun Electronics Co., Ltd.
Address	No.928 Nanhuan Road, Jiangnan High Technology Industry Park, Quanzhou, Fujian, China
Factory's name	Quanzhou Wouxun Electronics Co., Ltd.
Address	No.928 Nanhuan Road, Jiangnan High Technology Industry Park, Quanzhou, Fujian, China
Standard	EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013
Test sample(s) received	2016-10-28
Test in period.....	2016-10-28 to 2016-11-17
Procedure deviation	N.A.
Non-standard test method	N.A.
<p>Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).</p>	

Test item description: Two-Way Radio

Trademark: WOUXUN

Model/type reference: KG-UV9D, KG-UVD1P, KG-UV2D, KG-UV3D, KG-UV5D, KG-UV6D, KG-UV6D V2, KG-UVA1, KG-UV8D, KG-UV8D(Plus), KG-UV9D(Plus), KG-UV8E, KG-UV66, KG-UV899, KG-UV8T, KG-UVN1, KG-UV8Q, KG-UV8H, KG-UV9T, KG-UV9P, KG-UV9K

Manufacturer: Quanzhou Wouxun Electronics Co., Ltd.

Rating: EUT input: 12Vdc, 0.5A
Adapter input: 100-240Vac, 50/60Hz, 0.15A Max., output: 12.0Vdc, 0.5A

Copy of marking plate:



Note:

The CE marking and WEEE symbol (if any) should be at least 5,0mm and 7,0mm respectively in height.

- Manufacturers shall ensure that the equipment bears a type, batch or serial number or other element allowing its identification.
- Manufacturers shall indicate on the electrical equipment their name, registered trade name or registered trade mark and the postal address at which they can be contacted.
- Importers shall indicate on the electrical equipment their name, registered trade name or registered trade mark and the postal address at which they can be contacted.

Test item particulars	
Equipment mobility	<input checked="" type="checkbox"/> movable <input checked="" type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> stationary <input type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in
Connection to the mains.....	<input type="checkbox"/> pluggable equipment <input type="checkbox"/> type A <input type="checkbox"/> type B <input type="checkbox"/> detachable power supply cord <input type="checkbox"/> non-detachable power supply cord <input checked="" type="checkbox"/> not directly connected to the mains
Operating condition	<input checked="" type="checkbox"/> continuous <input type="checkbox"/> rated operating / resting time:
Access location	<input checked="" type="checkbox"/> operator accessible <input type="checkbox"/> restricted access location
Over voltage category (OVC)	<input type="checkbox"/> OVC I <input type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input checked="" type="checkbox"/> other: supplied by external adapter
Mains supply tolerance (%)	N/A
Tested for IT power systems	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
IT testing, phase-phase voltage (V)	N/A
Class of equipment	<input type="checkbox"/> Class I <input type="checkbox"/> Class II <input checked="" type="checkbox"/> Class III <input type="checkbox"/> Not classified
Considered current rating of protective device as part of the building installation (A)	N/A
Pollution degree (PD)	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
IP protection class	IPX0
Altitude during operation (m)	Up to 2000m
Altitude of test laboratory (m)	Below 2000m
Max. Specified ambient temperature(°C)	Charging: 40°C, discharging: 45°C.
Mass of equipment (kg)	Approx. 0.258kg (with battery pack, antenna)
Possible test case verdicts	
- test case does not apply to the test object.....: N/A(or N)	
- test object does meet the requirement.....: P(ass)	
- test object does not meet the requirement.....: F(ail)	
General remarks:	
"(see remark #)" refers to a remark appended to the report. (see appended table)" refers to a table appended to the report. The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the testing laboratory. Throughout this report a <input type="checkbox"/> comma/ <input checked="" type="checkbox"/> point is used as the decimal separator.	

Summary of testing:

1. All tests were performed under maximum normal operating condition.

General product information:

1. The product tested is a Two-Way Radio, built in a li-ion rechargeable battery and charging by an approved power adapter.
2. The product consists of charger base and radio.
3. Maximum operating temperature: Charging: 40°C, discharging: 45°C.

FINAL

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1	GENERAL		P
----------	----------------	--	----------

1.5	Components		P
1.5.1	General		P
	Comply with IEC 60950-1 or relevant component standard	(see appended tables 1.5.1)	P
1.5.2	Evaluation and testing of components	<p>Certified components are used in accordance with their ratings, certifications and they comply with applicable parts of this Standard.</p> <p>Components not certified are used in accordance with their ratings and they comply with IEC60950-1 and the relevant component Standard.</p> <p>Components, for which no relevant IEC Standard exist, have been tested under the condition occurring in the equipment, using applicable parts of IEC60950-1.</p>	P
1.5.3	Thermal controls	No thermal controls	N
1.5.4	Transformers	No such component	N
1.5.5	Interconnecting cables	The interconnecting cables contain only SELV.	P
1.5.6	Capacitors bridging insulation	No such component	N
1.5.7	Resistors bridging insulation	No such component	N
1.5.7.1	Resistors bridging functional, basic or supplementary insulation		N
1.5.7.2	Resistors bridging double or reinforced insulation between a.c. mains and other circuits		N
1.5.7.3	Resistors bridging double or reinforced insulation between a.c. mains and antenna or coaxial cable		N
1.5.8	Components in equipment for IT power systems		N
1.5.9	Surge suppressors	No such component	N
1.5.9.1	General		N
1.5.9.2	Protection of VDRs		N
1.5.9.3	Bridging of functional insulation by a VDR		N
1.5.9.4	Bridging of basic insulation by a VDR		N
1.5.9.5	Bridging of supplementary, double or reinforced insulation by a VDR		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.6	Power interface		P
1.6.1	AC power distribution systems	Class III equipment.	N
1.6.2	Input current	(See appended table 1.6.2)	P
1.6.3	Voltage limit of hand-held equipment	The rated voltage is less than 250Vac	P
1.6.4	Neutral conductor	Class III equipment.	N

1.7	Marking and instructions		P
1.7.1	Power rating and identification markings	See below	P
1.7.1.1	Power rating marking	Not directly connected to the mains	N
	Multiple mains supply connections.....:		N
	Rated voltage(s) or voltage range(s) (V)		N
	Symbol for nature of supply, for d.c. only		N
	Rated frequency or rated frequency range (Hz) ...:		N
	Rated current (mA or A)		N
1.7.1.2	Identification markings	See below.	P
	Manufacturer's name or trade-mark or identification mark	Quanzhou Wouxun Electronics Co., Ltd.	P
	Model identification or type reference	See copy of markig plate	P
	Symbol for Class II equipment only	Class III equipment.	N
	Other markings and symbols	The additional marking does not give rise to misunderstanding.	P
1.7.1.3	Use of graphical symbols	Considered	P
1.7.2	Safety instructions and marking	Operating/safety instructions provided in the user manual	P
1.7.2.1	General	Considered.	P
1.7.2.2	Disconnect devices	No such device	N
1.7.2.3	Overcurrent protective device	No such device	N
1.7.2.4	IT power distribution systems		N
1.7.2.5	Operator access with a tool		N
1.7.2.6	Ozone	The equipment does not produce ozone.	N
1.7.3	Short duty cycles	Continuous operation.	N
1.7.4	Supply voltage adjustment	No such component	N
	Methods and means of adjustment; reference to installation instructions		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.5	Power outlets on the equipment	No standard power outlet.	N
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference)	No such component	N
1.7.7	Wiring terminals	No such wiring terminals	N
1.7.7.1	Protective earthing and bonding terminals	No such terminals	N
1.7.7.2	Terminals for a.c. mains supply conductors	No connection to a.c. mains supply	N
1.7.7.3	Terminals for d.c. mains supply conductors	No connection to d.c. mains supply	N
1.7.8	Controls and indicators		N
1.7.8.1	Identification, location and marking		N
1.7.8.2	Colours	No indicators with colours where safety is involved.	N
1.7.8.3	Symbols according to IEC 60417		N
1.7.8.4	Markings using figures		N
1.7.9	Isolation of multiple power sources		N
1.7.10	Thermostats and other regulating devices	No thermostats or other regulating devices.	N
1.7.11	Durability	Rubbed with a cloth soaked with water for 15s then again for 15s with cloth soaked with petroleum spirit, after this test, the marking on the label did not fade there are no curling nor lifting of the label edge.	P
1.7.12	Removable parts	No such removable parts.	N
1.7.13	Replaceable batteries	Specified in user manual	P
	Language(s) :	English	—
1.7.14	Equipment for restricted access locations		N

2	PROTECTION FROM HAZARDS		P
2.1	Protection from electric shock and energy hazards		P
2.1.1	Protection in operator access areas	Only SELV circuits are accessible by operator.	P
2.1.1.1	Access to energized parts	See below	P
	Test by inspection	Protection established by enclosure.	P
	Test with test finger (Figure 2A)	No hazardous parts can be accessed.	P
	Test with test pin (Figure 2B)	No hazardous parts can be accessed.	P

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Test with test probe (Figure 2C)	No TNV circuits	N
2.1.1.2	Battery compartments	No such component	N
2.1.1.3	Access to ELV wiring	No ELV wiring	N
	Working voltage (V _{peak} or V _{rms}); minimum distance through insulation (mm)		—
2.1.1.4	Access to hazardous voltage circuit wiring	No hazardous voltage circuit wiring	N
2.1.1.5	Energy hazards	No energy hazards	P
2.1.1.6	Manual controls	No such device	N
2.1.1.7	Discharge of capacitors in equipment	No such component	N
	Measured voltage (V); time-constant (s)		—
2.1.1.8	Energy hazards – d.c. mains supply	No connection to d.c. mains supply	N
	a) Capacitor connected to the d.c. mains supply ..		N
	b) Internal battery connected to the d.c. mains supply		N
2.1.1.9	Audio amplifiers	Complied.	P
2.1.2	Protection in service access areas		N
2.1.3	Protection in restricted access locations		N

2.2	SELV circuits		P
2.2.1	General requirements	Class III equipment.	P
2.2.2	Voltages under normal conditions (V)	42.4V peak or 60V d.c. are not exceeded in SELV circuits.	P
2.2.3	Voltages under fault conditions (V)	Not exceed 42.4V peak or 60V d.c. for longer than 0.2s, and under limit of 71V peak or 120V d.c. within 0.2s.	P
2.2.4	Connection of SELV circuits to other circuits	Only intended to be connected with SELV circuits.	P

2.3	TNV circuits		N
2.3.1	Limits	No TNV circuits.	N
	Type of TNV circuits		—
2.3.2	Separation from other circuits and from accessible parts		N
2.3.2.1	General requirements		N
2.3.2.2	Protection by basic insulation		N
2.3.2.3	Protection by earthing		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.3.2.4	Protection by other constructions		N
2.3.3	Separation from hazardous voltages		N
	Insulation employed		—
2.3.4	Connection of TNV circuits to other circuits		N
	Insulation employed		—
2.3.5	Test for operating voltages generated externally		N
2.4	Limited current circuits		N
2.4.1	General requirements	No limited current circuits.	N
2.4.2	Limit values		N
	Frequency (Hz)		—
	Measured current (mA)		—
	Measured voltage (V)		—
	Measured circuit capacitance (nF or μ F)		—
2.4.3	Connection of limited current circuits to other circuits		N
2.5	Limited power sources		N
	a) Inherently limited output		N
	b) Impedance limited output		N
	c) Regulating network or IC current limiter, limits output under normal operating and single fault condition		N
	Use of integrated circuit (IC) current limiters		N
	d) Overcurrent protective device limited output		—
	Max. output voltage (V), max. output current (A), max. apparent power (VA)		—
	Current rating of overcurrent protective device (A) ..		
2.6	Provisions for earthing and bonding		N
2.6.1	Protective earthing	Class III equipment.	N
2.6.2	Functional earthing		N
	Use of symbol for functional earthing		N
2.6.3	Protective earthing and protective bonding conductors		N
2.6.3.1	General		N
2.6.3.2	Size of protective earthing conductors		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Rated current (A), cross-sectional area (mm ²), AWG		—
2.6.3.3	Size of protective bonding conductors		N
	Rated current (A), cross-sectional area (mm ²), AWG		—
	Protective current rating (A), cross-sectional area (mm ²), AWG		
2.6.3.4	Resistance of earthing conductors and their terminations; resistance (Ω), voltage drop (V), test current (A), duration (min).....		N
2.6.3.5	Colour of insulation		N
2.6.4	Terminals		N
2.6.4.1	General		N
2.6.4.2	Protective earthing and bonding terminals		N
	Rated current (A), type, nominal thread diameter (mm).....		—
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors		N
2.6.5	Integrity of protective earthing		N
2.6.5.1	Interconnection of equipment		N
2.6.5.2	Components in protective earthing conductors and protective bonding conductors		N
2.6.5.3	Disconnection of protective earth		N
2.6.5.4	Parts that can be removed by an operator		N
2.6.5.5	Parts removed during servicing		N
2.6.5.6	Corrosion resistance		N
2.6.5.7	Screws for protective bonding		N
2.6.5.8	Reliance on telecommunication network or cable distribution system		N

2.7	Overcurrent and earth fault protection in primary circuits		N
2.7.1	Basic requirements	Class III equipment	N
	Instructions when protection relies on building installation		N
2.7.2	Faults not simulated in 5.3.7		N
2.7.3	Short-circuit backup protection		N
2.7.4	Number and location of protective devices		N
2.7.5	Protection by several devices		N
2.7.6	Warning to service personnel		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.8	Safety interlocks		N
2.8.1	General principles	No safety interlocks	N
2.8.2	Protection requirements		N
2.8.3	Inadvertent reactivation		N
2.8.4	Fail-safe operation		N
	Protection against extreme hazard		N
2.8.5	Moving parts		N
2.8.6	Overriding		N
2.8.7	Switches, relays and their related circuits		N
2.8.7.1	Separation distances for contact gaps and their related circuits (mm)		N
2.8.7.2	Overload test		N
2.8.7.3	Endurance test		N
2.8.7.4	Electric strength test		N
2.8.8	Mechanical actuators		N

2.9	Electrical insulation		P
2.9.1	Properties of insulating materials	Class III equipment, only functional insulation.	P
2.9.2	Humidity conditioning		N
	Relative humidity (%), temperature (°C)		—
2.9.3	Grade of insulation	Functional insulation.	P
2.9.4	Separation from hazardous voltages		N
	Method(s) used		—

2.10	Clearances, creepage distances and distances through insulation		N
2.10.1	General	Only function insulation and comply with 5.3.4 c)	N
2.10.1.1	Frequency		N
2.10.1.2	Pollution degrees		N
2.10.1.3	Reduced values for functional insulation		N
2.10.1.4	Intervening unconnected conductive parts		N
2.10.1.5	Insulation with varying dimensions		N
2.10.1.6	Special separation requirements		N
2.10.1.7	Insulation in circuits generating starting pulses		N
2.10.2	Determination of working voltage		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.2.1	General		N
2.10.2.2	RMS working voltage		N
2.10.2.3	Peak working voltage		N
2.10.3	Clearances		N
2.10.3.1	General		N
2.10.3.2	Mains transient voltages		N
	a) AC mains supply		N
	b) Earthed d.c. mains supplies		N
	c) Unearthed d.c. mains supplies		N
	d) Battery operation		N
2.10.3.3	Clearances in primary circuits		N
2.10.3.4	Clearances in secondary circuits		N
2.10.3.5	Clearances in circuits having starting pulses		N
2.10.3.6	Transients from a.c. mains supply		N
2.10.3.7	Transients from d.c. mains supply		N
2.10.3.8	Transients from telecommunication networks and cable distribution systems		N
2.10.3.9	Measurement of transient voltage levels		N
	a) Transients from a mains supply		N
	For an a.c. mains supply		N
	For a d.c. mains supply		N
	b) Transients from a telecommunication network :		N
2.10.4	Creepage distances		N
2.10.4.1	General		N
2.10.4.2	Material group and comparative tracking index		N
	CTI tests.....		—
2.10.4.3	Minimum creepage distances		N
2.10.5	Solid insulation		N
2.10.5.1	General		N
2.10.5.2	Distances through insulation		N
2.10.5.3	Insulating compound as solid insulation		N
2.10.5.4	Semiconductor devices		N
2.10.5.5	Cemented joints		N
2.10.5.6	Thin sheet material – General		N
2.10.5.7	Separable thin sheet material		N
	Number of layers (pcs)		—

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.5.8	Non-separable thin sheet material		N
2.10.5.9	Thin sheet material – standard test procedure		N
	Electric strength test		—
2.10.5.10	Thin sheet material – alternative test procedure		N
	Electric strength test		—
2.10.5.11	Insulation in wound components		N
2.10.5.12	Wire in wound components		N
	Working voltage		N
	a) Basic insulation not under stress		N
	b) Basic, supplementary, reinforced insulation		N
	c) Compliance with Annex U		N
	Two wires in contact inside wound component; angle between 45° and 90°		N
2.10.5.13	Wire with solvent-based enamel in wound components		N
	Electric strength test		—
	Routine test		N
2.10.5.14	Additional insulation in wound components		N
	Working voltage		N
	- Basic insulation not under stress		N
	- Supplementary, reinforced insulation		N
2.10.6	Construction of printed boards		N
2.10.6.1	Uncoated printed boards		N
2.10.6.2	Coated printed boards		N
2.10.6.3	Insulation between conductors on the same inner surface of a printed board		N
2.10.6.4	Insulation between conductors on different layers of a printed board		N
	Distance through insulation		N
	Number of insulation layers (pcs)		N
2.10.7	Component external terminations		N
2.10.8	Tests on coated printed boards and coated components		N
2.10.8.1	Sample preparation and preliminary inspection		N
2.10.8.2	Thermal conditioning		N
2.10.8.3	Electric strength test		N
2.10.8.4	Abrasion resistance test		N
2.10.9	Thermal cycling		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.10	Test for Pollution Degree 1 environment and insulating compound		N
2.10.11	Tests for semiconductor devices and cemented joints		N
2.10.12	Enclosed and sealed parts		N

3	WIRING, CONNECTIONS AND SUPPLY		P
3.1	General		P
3.1.1	Current rating and overcurrent protection	Adequate cross-sectional area of internal wiring	P
3.1.2	Protection against mechanical damage		P
3.1.3	Securing of internal wiring		P
3.1.4	Insulation of conductors		P
3.1.5	Beads and ceramic insulators		N
3.1.6	Screws for electrical contact pressure	No such screws	N
3.1.7	Insulating materials in electrical connections		N
3.1.8	Self-tapping and spaced thread screws	No such screws	N
3.1.9	Termination of conductors		N
	10 N pull test		N
3.1.10	Sleeving on wiring	No sleeving	N

3.2	Connection to a mains supply		N
3.2.1	Means of connection	Class III equipment	N
3.2.1.1	Connection to an a.c. mains supply		N
3.2.1.2	Connection to a d.c. mains supply		N
3.2.2	Multiple supply connections		N
3.2.3	Permanently connected equipment		N
	Number of conductors, diameter of cable and conduits (mm)		—
3.2.4	Appliance inlets		N
3.2.5	Power supply cords		N
3.2.5.1	AC power supply cords		N
	Type		—
	Rated current (A), cross-sectional area (mm ²), AWG		—
3.2.5.2	DC power supply cords		N
3.2.6	Cord anchorages and strain relief		N
	Mass of equipment (kg), pull (N)		—

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Longitudinal displacement (mm)		—
3.2.7	Protection against mechanical damage		N
3.2.8	Cord guards		N
	Diameter or minor dimension D (mm); test mass (g)		—
	Radius of curvature of cord (mm)		—
3.2.9	Supply wiring space		N
3.3	Wiring terminals for connection of external conductors		N
3.3.1	Wiring terminals	No wiring terminals	N
3.3.2	Connection of non-detachable power supply cords		N
3.3.3	Screw terminals		N
3.3.4	Conductor sizes to be connected		N
	Rated current (A), cord/cable type, cross-sectional area (mm ²)		—
3.3.5	Wiring terminal sizes		N
	Rated current (A), type, nominal thread diameter (mm)		—
3.3.6	Wiring terminal design		N
3.3.7	Grouping of wiring terminals		N
3.3.8	Stranded wire		N
3.4	Disconnection from the mains supply		N
3.4.1	General requirement	Class III equipment	N
3.4.2	Disconnect devices		N
3.4.3	Permanently connected equipment		N
3.4.4	Parts which remain energized		N
3.4.5	Switches in flexible cords		N
3.4.6	Number of poles - single-phase and d.c. equipment		N
3.4.7	Number of poles - three-phase equipment		N
3.4.8	Switches as disconnect devices		N
3.4.9	Plugs as disconnect devices		N
3.4.10	Interconnected equipment		N
3.4.11	Multiple power sources		N
3.5	Interconnection of equipment		P

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

3.5.1	General requirements		P
3.5.2	Types of interconnection circuits :	SELV circuits only	P
3.5.3	ELV circuits as interconnection circuits		N
3.5.4	Data ports for additional equipment		N

4	PHYSICAL REQUIREMENTS		P
4.1	Stability		N
	Angle of 10°	Mass < 7kg	N
	Test force (N) :		N

4.2	Mechanical strength		P
4.2.1	General	See below	P
	Rack-mounted equipment.	Not rack-mounted equipment.	N
4.2.2	Steady force test, 10 N	Class III equipment	N
4.2.3	Steady force test, 30 N		N
4.2.4	Steady force test, 250 N	No hazards	P
4.2.5	Impact test		N
	Fall test		N
	Swing test		N
4.2.6	Drop test; height (mm) :	1000mm drop test is applied three times on different directions, no hazards as a result of test.	P
4.2.7	Stress relief test	88°C, for 7hrs, no hazards	P
4.2.8	Cathode ray tubes	No such tubes	N
	Picture tube separately certified :		N
4.2.9	High pressure lamps	No such lamps	N
4.2.10	Wall or ceiling mounted equipment; force (N) :		N

4.3	Design and construction		P
4.3.1	Edges and corners	All coners are smooth and rounded	P
4.3.2	Handles and manual controls; force (N)..... :	No such device	N
4.3.3	Adjustable controls	No adjustable controls.	N
4.3.4	Securing of parts		N
4.3.5	Connection by plugs and sockets		N
4.3.6	Direct plug-in equipment		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Torque		—
	Compliance with the relevant mains plug standard		N
4.3.7	Heating elements in earthed equipment	No such component	N
4.3.8	Batteries	Built in a 7.4V/2000mAh Liion rechargeable battery, see appended table 1.5.1	P
	- Overcharging of a rechargeable battery		P
	- Unintentional charging of a non-rechargeable battery		N
	- Reverse charging of a rechargeable battery	The construction design prevented likelihood of reverse charging of a rechargeable battery	N
	- Excessive discharging rate for any battery	(see appended table 4.3.8)	P
4.3.9	Oil and grease	No oil and grease	N
4.3.10	Dust, powders, liquids and gases		N
4.3.11	Containers for liquids or gases		N
4.3.12	Flammable liquids		N
	Quantity of liquid (l)		N
	Flash point (°C)		N
4.3.13	Radiation	See below.	P
4.3.13.1	General	See below.	P
4.3.13.2	Ionizing radiation		N
	Measured radiation (pA/kg)		—
	Measured high-voltage (kV)		—
	Measured focus voltage (kV)		—
	CRT markings		—
4.3.13.3	Effect of ultraviolet (UV) radiation on materials		N
	Part, property, retention after test, flammability classification		N
4.3.13.4	Human exposure to ultraviolet (UV) radiation		N
4.3.13.5	Lasers (including laser diodes) and LEDs	LED complied with EN 62471	P
4.3.13.5.1	Lasers (including laser diodes)		N
	Laser class		—
4.3.13.5.2	Light emitting diodes (LEDs)	LED complied with EN 62471	P
4.3.13.6	Other types		N
4.4	Protection against hazardous moving parts		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.4.1	General		N
4.4.2	Protection in operator access areas		N
	Household and home/office document/media shredders		N
4.4.3	Protection in restricted access locations		N
4.4.4	Protection in service access areas		N
4.4.5	Protection against moving fan blades		N
4.4.5.1	General		N
	Not considered to cause pain or injury. a).....:		N
	Is considered to cause pain, not injury. b)		N
	Considered to cause injury. c)		N
4.4.5.2	Protection for users		N
	Use of symbol or warning		N
4.4.5.3	Protection for service persons		N
	Use of symbol or warning		N

4.5	Thermal requirements		P
4.5.1	General	See below	P
4.5.2	Temperature tests	(see appended table 4.5)	P
	Normal load condition per Annex L		—
4.5.3	Temperature limits for materials	(see appended table 4.5)	P
4.5.4	Touch temperature limits	(see appended table 4.5)	P
4.5.5	Resistance to abnormal heat		N

4.6	Openings in enclosures		N
4.6.1	Top and side openings	No openings	N
	Dimensions (mm)		—
4.6.2	Bottoms of fire enclosures	No fire enclosure needed	N
	Construction of the bottom, dimensions (mm) ...:		—
4.6.3	Doors or covers in fire enclosures		N
4.6.4	Openings in transportable equipment		N
4.6.4.1	Constructional design measures		N
	Dimensions (mm)		—

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.6.4.2	Evaluation measures for larger openings		N
4.6.4.3	Use of metallized parts		N
4.6.5	Adhesives for constructional purposes		N
	Conditioning temperature (°C), time (weeks) :		—

4.7	Resistance to fire		P
4.7.1	Reducing the risk of ignition and spread of flame	Method 1 used. See below.	P
	Method 1, selection and application of components wiring and materials	Materials with the required flammability classes are used-see appended table 1.5.1	P
	Method 2, application of all of simulated fault condition tests		N
4.7.2	Conditions for a fire enclosure	See below	P
4.7.2.1	Parts requiring a fire enclosure	Charger cup is powered from adapter with L.P.S. The battery pack output not complies with LPS, fire enclosure is required	P
4.7.2.2	Parts not requiring a fire enclosure		N
4.7.3	Materials		P
4.7.3.1	General	See below	P
4.7.3.2	Materials for fire enclosures	Plastic material is V-1 rated or better	P
4.7.3.3	Materials for components and other parts outside fire enclosures		N
4.7.3.4	Materials for components and other parts inside fire enclosures	PWB V-1 rated or better, internal wiring insulated by PVC material	P
4.7.3.5	Materials for air filter assemblies	No air filters in the equipment.	N
4.7.3.6	Materials used in high-voltage components	No parts exceeding 4kV.	N

5	ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS		P
5.1	Touch current and protective conductor current		N
5.1.1	General	Class III equipment.	N
5.1.2	Configuration of equipment under test (EUT)		N
5.1.2.1	Single connection to an a.c. mains supply		N
5.1.2.2	Redundant multiple connections to an a.c. mains supply		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.1.2.3	Simultaneous multiple connections to an a.c. mains supply		N
5.1.3	Test circuit		N
5.1.4	Application of measuring instrument		N
5.1.5	Test procedure		N
5.1.6	Test measurements		N
	Supply voltage (V)		—
	Measured touch current (mA)		—
	Max. allowed touch current (mA)		—
	Measured protective conductor current (mA)		—
	Max. allowed protective conductor current (mA) ..		—
5.1.7	Equipment with touch current exceeding 3,5 mA		N
5.1.7.1	General		N
5.1.7.2	Simultaneous multiple connections to the supply		N
5.1.8	Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks		N
5.1.8.1	Limitation of the touch current to a telecommunication network or to a cable distribution system		N
	Supply voltage (V)		—
	Measured touch current (mA)		—
	Max. allowed touch current (mA)		—
5.1.8.2	Summation of touch currents from telecommunication networks		N
	a) EUT with earthed telecommunication ports		N
	b) EUT whose telecommunication ports have no reference to protective earth		N

5.2	Electric strength		N
5.2.1	General	Function insulation comply with 5.3.4 c)	N
5.2.2	Test procedure		N

5.3	Abnormal operating and fault conditions		P
5.3.1	Protection against overload and abnormal operation	(See appended table 5.3)	P
5.3.2	Motors	No such component.	N
5.3.3	Transformers	No such component.	N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.3.4	Functional insulation	Complies with c).	P
5.3.5	Electromechanical components	No such component.	N
5.3.6	Audio amplifiers in ITE	(See appended table 5.3)	P
5.3.7	Simulation of faults	(See appended table 5.3)	P
5.3.8	Unattended equipment		N
5.3.9	Compliance criteria for abnormal operating and fault conditions	(See appended table 5.3)	P
5.3.9.1	During the tests	No hazards.	P
5.3.9.2	After the tests		N
6	CONNECTION TO TELECOMMUNICATION NETWORKS		N
6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment		N
6.1.1	Protection from hazardous voltages		N
6.1.2	Separation of the telecommunication network from earth		N
6.1.2.1	Requirements	No TNV circuits.	N
	Supply voltage (V)		—
	Current in the test circuit (mA)		—
6.1.2.2	Exclusions		N
6.2	Protection of equipment users from overvoltages on telecommunication networks		N
6.2.1	Separation requirements	No TNV circuits.	N
6.2.2	Electric strength test procedure		N
6.2.2.1	Impulse test		N
6.2.2.2	Steady-state test		N
6.2.2.3	Compliance criteria		N
6.3	Protection of the telecommunication wiring system from overheating		N
	Max. output current (A)	No TNV circuits.	—
	Current limiting method		—
7	CONNECTION TO CABLE DISTRIBUTION SYSTEMS		N
7.1	General	No connected to cable distribution system.	N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment		N
7.3	Protection of equipment users from overvoltages on the cable distribution system		N
7.4	Insulation between primary circuits and cable distribution systems		N
7.4.1	General		N
7.4.2	Voltage surge test		N
7.4.3	Impulse test		N

A	ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE		N
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)		N
A.1.1	Samples		—
	Wall thickness (mm)		—
A.1.2	Conditioning of samples; temperature (°C)		N
A.1.3	Mounting of samples		N
A.1.4	Test flame (see IEC 60695-11-3)		N
	Flame A, B, C or D		—
A.1.5	Test procedure		N
A.1.6	Compliance criteria		N
	Sample 1 burning time (s).....		—
	Sample 2 burning time (s).....		—
	Sample 3 burning time (s).....		—
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N
A.2.1	Samples, material		—
	Wall thickness (mm)		—
A.2.2	Conditioning of samples; temperature (°C)		N
A.2.3	Mounting of samples		N
A.2.4	Test flame (see IEC 60695-11-4)		N
	Flame A, B or C		—
A.2.5	Test procedure		N
A.2.6	Compliance criteria		N
	Sample 1 burning time (s).....		—

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Sample 2 burning time (s)..... :		—
	Sample 3 burning time (s)..... :		—
A.2.7	Alternative test acc. to IEC 60695-11-5, cl. 5 and 9		N
	Sample 1 burning time (s)..... :		—
	Sample 2 burning time (s)..... :		—
	Sample 3 burning time (s)..... :		—
A.3	Hot flaming oil test (see 4.6.2)		N
A.3.1	Mounting of samples		N
A.3.2	Test procedure		N
A.3.3	Compliance criterion		N

B	ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)		N
B.1	General requirements		N
	Position		—
	Manufacturer		—
	Type		—
	Rated values		—
B.2	Test conditions		N
B.3	Maximum temperatures		N
B.4	Running overload test		N
B.5	Locked-rotor overload test		N
	Test duration (days)		—
	Electric strength test: test voltage (V)		—
B.6	Running overload test for d.c. motors in secondary circuits		N
B.6.1	General		N
B.6.2	Test procedure		N
B.6.3	Alternative test procedure		N
B.6.4	Electric strength test; test voltage (V)		N
B.7	Locked-rotor overload test for d.c. motors in secondary circuits		N
B.7.1	General		N
B.7.2	Test procedure		N
B.7.3	Alternative test procedure		N
B.7.4	Electric strength test; test voltage (V)		N
B.8	Test for motors with capacitors		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.9	Test for three-phase motors		N
B.10	Test for series motors		N
	Operating voltage (V) :		—
C	ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)		N
	Position :		—
	Manufacturer :		—
	Type :		—
	Rated values :		—
	Method of protection :		—
C.1	Overload test		N
C.2	Insulation		N
	Protection from displacement of windings :		N
D	ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)		N
D.1	Measuring instrument		N
D.2	Alternative measuring instrument		N
E	ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)		N
F	ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G)		N
G	ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES		N
G.1	Clearances		N
G.1.1	General		N
G.1.2	Summary of the procedure for determining minimum clearances		N
G.2	Determination of mains transient voltage (V)		N
G.2.1	AC mains supply :		N
G.2.2	Earthed d.c. mains supplies :		N
G.2.3	Unearthed d.c. mains supplies :		N
G.2.4	Battery operation :		N
G.3	Determination of telecommunication network transient voltage (V) :		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.4	Determination of required withstand voltage (V)		N
G.4.1	Mains transients and internal repetitive peaks :		N
G.4.2	Transients from telecommunication networks :		N
G.4.3	Combination of transients		N
G.4.4	Transients from cable distribution systems		N
G.5	Measurement of transient voltages (V)		N
	a) Transients from a mains supply		N
	For an a.c. mains supply		N
	For a d.c. mains supply		N
	b) Transients from a telecommunication network		N
G.6	Determination of minimum clearances :		N
H	ANNEX H, IONIZING RADIATION (see 4.3.13)		N
J	ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)		N
	Metal(s) used :		—
K	ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8)		N
K.1	Making and breaking capacity		N
K.2	Thermostat reliability; operating voltage (V) :		N
K.3	Thermostat endurance test; operating voltage (V) :		N
K.4	Temperature limiter endurance; operating voltage (V) :		N
K.5	Thermal cut-out reliability		N
K.6	Stability of operation		N
L	ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2)		P
L.1	Typewriters		N
L.2	Adding machines and cash registers		N
L.3	Erasers		N
L.4	Pencil sharpeners		N
L.5	Duplicators and copy machines		N
L.6	Motor-operated files		N
L.7	Other business equipment	(See appended table 1.6.2)	P

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
M	ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)		N
M.1	Introduction		N
M.2	Method A		N
M.3	Method B		N
M.3.1	Ringing signal		N
M.3.1.1	Frequency (Hz)		—
M.3.1.2	Voltage (V)		—
M.3.1.3	Cadence; time (s), voltage (V)		—
M.3.1.4	Single fault current (mA)		—
M.3.2	Tripping device and monitoring voltage		N
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N
M.3.2.2	Tripping device		N
M.3.2.3	Monitoring voltage (V)		N
N	ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5)		N
N.1	ITU-T impulse test generators		N
N.2	IEC 60065 impulse test generator		N
P	ANNEX P, NORMATIVE REFERENCES		—
Q	ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1)		N
	- Preferred climatic categories		N
	- Maximum continuous voltage		N
	- Combination pulse current		N
	Body of the VDR Test according to IEC60695-11-5.....		N
	Body of the VDR. Flammability class of material (min V-1).....		N
R	ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES		N
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2)		N
R.2	Reduced clearances (see 2.10.3)		N
S	ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
S.1	Test equipment		N
S.2	Test procedure		N
S.3	Examples of waveforms during impulse testing		N
T	ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)		N
			—
U	ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)		N
			—
V	ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)		N
V.1	Introduction		N
V.2	TN power distribution systems		N
W	ANNEX W, SUMMATION OF TOUCH CURRENTS		N
W.1	Touch current from electronic circuits		N
W.1.1	Floating circuits		N
W.1.2	Earthed circuits		N
W.2	Interconnection of several equipments		N
W.2.1	Isolation		N
W.2.2	Common return, isolated from earth		N
W.2.3	Common return, connected to protective earth		N
X	ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)		N
X.1	Determination of maximum input current		N
X.2	Overload test procedure		N
Y	ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)		N
Y.1	Test apparatus		N
Y.2	Mounting of test samples		N
Y.3	Carbon-arc light-exposure apparatus		N
Y.4	Xenon-arc light exposure apparatus		N
Z	ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2)		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

AA	ANNEX AA, MANDREL TEST (see 2.10.5.8)		N
-----------	--	--	---

BB	ANNEX BB, CHANGES IN THE SECOND EDITION		—
-----------	--	--	---

CC	ANNEX CC, Evaluation of integrated circuit (IC) current limiters		N
CC.1	General		N
CC.2	Test program 1.....:		N
CC.3	Test program 2.....:		N
CC.4	Test program 3.....:		N
CC.5	Compliance.....:		N

DD	ANNEX DD, Requirements for the mounting means of rack-mounted equipment		N
DD.1	General		N
DD.2	Mechanical strength test, variable N.....:		N
DD.3	Mechanical strength test, 250N, including end stops.....:		N
DD.4	Compliance.....:		N

EE	ANNEX EE, Household and home/office document/media shredders		N
EE.1	General		N
EE.2	Markings and instructions		N
	Use of markings or symbols.....:		N
	Information of user instructions, maintenance and/or servicing instructions.....:		N
EE.3	Inadvertent reactivation test.....:		N
EE.4	Disconnection of power to hazardous moving parts:		N
	Use of markings or symbols.....:		N
EE.5	Protection against hazardous moving parts		N
	Test with test finger (Figure 2A)		N
	Test with wedge probe (Figure EE1 and EE2)		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Group differences																																																																														
COMMON MODIFICATIONS																																																																														
Contents	Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZC (informative) A-deviations					P																																																																								
Contents (A2: 2013)	Add the following: Annex ZD (informative) IEC and CENELEC code designations for flexible cords					P																																																																								
Whole document (A2: 2013)	Delete all the “country” notes in the reference document according to the following list:					P																																																																								
	2.7.1	Note *	2.10.3.1	Note 2	6.2.2		Note																																																																							
	* Note of secretary: Text of Common Modification remains unchanged For special national conditions, see Annex ZB.																																																																													
General	Delete all the “country” notes in the reference document according to the following list: <table><tr><td>1.4.8</td><td>Note 2</td><td>1.5.1</td><td>Note 2 & 3</td><td>1.5.7.1</td><td>Note</td></tr><tr><td>1.5.8</td><td>Note 2</td><td>1.5.9.4</td><td>Note</td><td>1.7.2.1</td><td>Note 4, 5 & 6</td></tr><tr><td>2.2.3</td><td>Note</td><td>2.2.4</td><td>Note</td><td>2.3.2</td><td>Note</td></tr><tr><td>2.3.2.1</td><td>Note 2</td><td>2.3.4</td><td>Note 2</td><td>2.6.3.3</td><td>Note 2 & 3</td></tr><tr><td>2.7.1</td><td>Note</td><td>2.10.3.2</td><td>Note 2</td><td>2.10.5.13</td><td>Note 3</td></tr><tr><td>3.2.1.1</td><td>Note</td><td>3.2.4</td><td>Note</td><td>3.2.5.1</td><td>Note 2</td></tr><tr><td>4.3.6</td><td>Note 1 & 2</td><td>4.7</td><td>Note 4</td><td>4.7.2.2</td><td>Note</td></tr><tr><td>4.7.3.1</td><td>Note 2</td><td>5.1.7.1</td><td>Note 3 & 4</td><td>5.3.7</td><td>Note 1</td></tr><tr><td>6</td><td>Note 2 & 5</td><td>6.1.2.1</td><td>Note 2</td><td>6.1.2.2</td><td>Note</td></tr><tr><td>6.2.2</td><td>Note</td><td>6.2.2.1</td><td>Note 2</td><td>6.2.2.2</td><td>Note</td></tr><tr><td>7.1</td><td>Note 3</td><td>7.2</td><td>Note</td><td>7.3</td><td>Note 1 & 2</td></tr><tr><td>G.2.1</td><td>Note 2</td><td>Annex H</td><td>Note 2</td><td></td><td></td></tr></table>					1.4.8	Note 2	1.5.1	Note 2 & 3	1.5.7.1	Note	1.5.8	Note 2	1.5.9.4	Note	1.7.2.1	Note 4, 5 & 6	2.2.3	Note	2.2.4	Note	2.3.2	Note	2.3.2.1	Note 2	2.3.4	Note 2	2.6.3.3	Note 2 & 3	2.7.1	Note	2.10.3.2	Note 2	2.10.5.13	Note 3	3.2.1.1	Note	3.2.4	Note	3.2.5.1	Note 2	4.3.6	Note 1 & 2	4.7	Note 4	4.7.2.2	Note	4.7.3.1	Note 2	5.1.7.1	Note 3 & 4	5.3.7	Note 1	6	Note 2 & 5	6.1.2.1	Note 2	6.1.2.2	Note	6.2.2	Note	6.2.2.1	Note 2	6.2.2.2	Note	7.1	Note 3	7.2	Note	7.3	Note 1 & 2	G.2.1	Note 2	Annex H	Note 2			P
1.4.8	Note 2	1.5.1	Note 2 & 3	1.5.7.1	Note																																																																									
1.5.8	Note 2	1.5.9.4	Note	1.7.2.1	Note 4, 5 & 6																																																																									
2.2.3	Note	2.2.4	Note	2.3.2	Note																																																																									
2.3.2.1	Note 2	2.3.4	Note 2	2.6.3.3	Note 2 & 3																																																																									
2.7.1	Note	2.10.3.2	Note 2	2.10.5.13	Note 3																																																																									
3.2.1.1	Note	3.2.4	Note	3.2.5.1	Note 2																																																																									
4.3.6	Note 1 & 2	4.7	Note 4	4.7.2.2	Note																																																																									
4.7.3.1	Note 2	5.1.7.1	Note 3 & 4	5.3.7	Note 1																																																																									
6	Note 2 & 5	6.1.2.1	Note 2	6.1.2.2	Note																																																																									
6.2.2	Note	6.2.2.1	Note 2	6.2.2.2	Note																																																																									
7.1	Note 3	7.2	Note	7.3	Note 1 & 2																																																																									
G.2.1	Note 2	Annex H	Note 2																																																																											
General (A1:2010)	In IEC 60950-1:2005/A1 delete all the “country” notes according to the following list: - 1.5.7.1: Note - 6.1.2.1: Note 2 - 6.2.2.1: Note 2 - EE.3: Note					N																																																																								
1.1.1 (A1:2010)	Replace the text of NOTE 3 by the following NOTE 3 The requirements of EN 60065 may also be used to meet safety requirements for multimedia equipment. See IEC Guide 112, Guide on the safety of multimedia equipment. For television sets EN 60065 applies.					N																																																																								

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.2.3 (A1:2010)	<p>Add the following definition:</p> <p>1.2.3.Z1</p> <p>PORTABLE SOUND SYSTEM</p> <p>small battery powered audio equipment:</p> <ul style="list-style-type: none"> – whose prime purpose is to listen to recorded or broadcasted sound; and – that uses headphones or earphones that can be worn in or on or around the ears; and – that allows the user to walk around <p>NOTE Examples are mini-disk or CD players; MP3 audio players or similar equipment.</p>		N
1.3.Z1	<p>Add the following subclause:</p> <p>1.3.Z1 Exposure to excessive sound pressure</p> <p>The apparatus shall be so designed and constructed as to present no danger when used for its intended purpose, either in normal operating conditions or under fault conditions, particularly providing protection against exposure to excessive sound pressures from headphones or earphones.</p> <p>NOTE Z1 A new method of measurement is described in EN 50332-1, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for “one package equipment”, and in EN 50332-2, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Guidelines to associate sets with headphones coming from different manufacturers.</p>		N
1.5.1	<p>Add the following NOTE:</p> <p>NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC</p>		N
1.7.2.1	<p>Add the following NOTE:</p> <p>NOTE Z1 In addition, the instructions shall include, as far as applicable, a warning that excessive sound pressure from earphones and headphones can cause hearing loss</p>		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.1 (A1:2010)	<p>Delete NOTE Z1.</p> <p>Add the following paragraph at the end of the subclause:</p> <p>In addition, for a PORTABLE SOUND SYSTEM, the instructions shall include a warning that excessive sound pressure from earphones and headphones can cause hearing loss.</p>		N
2.7.1	<p>Replace the subclause as follows:</p> <p>Basic requirements</p> <p>To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>		N
2.7.2	This subclause has been declared 'void'.		N
3.2.3	Delete the NOTE in Table 3A, and delete also in this table the conduit sizes in parentheses.		N

Test Report No.: TEXAM15120007-00

EN 60950-1															
Clause	Requirement + Test	Result - Remark	Verdict												
3.2.5.1	<p>Replace</p> <p>“60245 IEC 53” by “H05 RR-F”; “60227 IEC 52” by “H03 VV-F or H03 VVH2-F”; “60227 IEC 53” by “H05 VV-F or H05 VVH2-F2”.</p> <p>In Table 3B, replace the first four lines by the following:</p> <table><tr><td> Up to and including 6</td><td> </td></tr><tr><td>0,75 ^{a)} </td><td></td></tr><tr><td> Over 6 up to and including 10</td><td> (0,75) ^{b)}</td></tr><tr><td>1,0 </td><td></td></tr><tr><td> Over 10 up to and including 16</td><td> (1,0) ^{c)} 1,5</td></tr><tr><td> </td><td></td></tr></table> <p>In the conditions applicable to Table 3B delete the words “in some countries” in condition ^{a)}.</p> <p>In NOTE 1, applicable to Table 3B, delete the second sentence.</p>	Up to and including 6		0,75 ^{a)}		Over 6 up to and including 10	(0,75) ^{b)}	1,0		Over 10 up to and including 16	(1,0) ^{c)} 1,5				N
Up to and including 6															
0,75 ^{a)}															
Over 6 up to and including 10	(0,75) ^{b)}														
1,0															
Over 10 up to and including 16	(1,0) ^{c)} 1,5														
3.2.5.1 (A2: 2013)	<p>Add the following Note:</p> <p>NOTE Z1 The harmonised code designations corresponding to the IEC cord types are given in Annex ZD.</p>		N												
3.3.4	<p>In Table 3D, delete the fourth line: conductor sizes for 10 to 13 A, and replace with the following:</p> <table><tr><td> Over 10 up to and including 16</td><td> 1,5 to 2,5 </td></tr><tr><td>1,5 to 4 </td><td></td></tr></table> <p>Delete the fifth line: conductor sizes for 13 to 16 A.</p>	Over 10 up to and including 16	1,5 to 2,5	1,5 to 4			N								
Over 10 up to and including 16	1,5 to 2,5														
1,5 to 4															
4.3.13.6	<p>Add the following NOTE:</p> <p>NOTE Z1 Attention is drawn to 1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz. Standards taking into account this Recommendation which demonstrate compliance with the applicable EU Directive are indicated in the OJEC.</p>		N												
4.3.13.6 (A1:2010)	<p>Replace the existing NOTE by the following:</p> <p>NOTE Z1 Attention is drawn to :</p> <p>1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz, and</p> <p>2006/25/EC: Directive on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation).</p> <p>Standards taking into account mentioned Recommendation and Directive which demonstrate compliance with the applicable EU Directive are indicated in the OJEC.</p>		N												

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
Annex H	<p>Replace the last paragraph of this annex by:</p> <p>At any point 10 cm from the surface of the OPERATOR ACCESS AREA, the dose rate shall not exceed 1 μSv/h (0,1 mR/h) (see NOTE). Account is taken of the background level.</p> <p>Replace the notes as follows:</p> <p>NOTE These values appear in Directive 96/29/Euratom.</p> <p>Delete NOTE 2.</p>		N
Bibliography	<p>Add the following standards:</p> <p>EN 50332-1:2000, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for "one package equipment"</p> <p>EN 50332-2:2003, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Matching of sets with headphones if either or both are offered separately</p> <p>Add the following notes for the standards indicated:</p> <p>IEC 60127 NOTE Harmonized in EN 60127 series (not modified).</p> <p>IEC 60369-2-1 NOTE Harmonized as HD 60369-2-1:2005 (modified).</p> <p>IEC 60364-4-41 NOTE Harmonized as HD 384.4.41 S2:1996 (modified).</p> <p>IEC 60529 NOTE Harmonized as EN 60529:1991 (not modified).</p> <p>IEC 60664-4 NOTE Harmonized as EN 60664-4:2006 (not modified).</p> <p>IEC 60728-11 NOTE Harmonized as EN 60728-11:2005 (modified).</p> <p>IEC 60896-21 NOTE Harmonized as EN 60896-21:2004 (not modified).</p> <p>IEC 60896-22 NOTE Harmonized as EN 60896-22:2004 (not modified).</p> <p>IEC 61032 NOTE Harmonized as EN 61032:1998 (not modified).</p>		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>IEC 61140 NOTE Harmonized as EN 61140:2002 (not modified).</p> <p>IEC 61558-1 NOTE Harmonized as EN 61558-1:2005 (not modified).</p> <p>IEC 61643-21 NOTE Harmonized as EN 61643-21:2001 (not modified).</p> <p>IEC 61643-311 NOTE Harmonized as EN 61643-311:2001 (not modified).</p> <p>IEC 61643-321 NOTE Harmonized as EN 61643-321:2002 (not modified).</p> <p>IEC 61643-331 NOTE Harmonized as EN 61643-331:2003 (not modified).</p> <p>IEC 61965 NOTE Harmonized as EN 61965:2003 (not modified).</p> <p>ISO 4892 NOTE Harmonized in EN ISO 4892 series (not modified).</p>		N
Bibliography (A1:2010)	<p>Add the following note for the standard indicated:</p> <p>IEC 60908 NOTE Harmonized as EN 60908.</p>		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

ZA (A2: 2013)	Normative references to international publications with their corresponding European publications	N
-------------------------	--	---

ZB	Special national conditions Special national condition: National characteristic or practice that cannot be changed even over a long period, e.g. climatic conditions, electrical earthing conditions. NOTE If it affects harmonization, it forms part of the European Standard. For the countries in which the relevant special national conditions apply these provisions are normative, for other countries they are informative.	N
1.2.4.1	In Denmark , certain types of Class I appliances (see 3.2.1.1) may be provided with a plug not establishing earthing conditions when inserted into Danish socket-outlets.	N
1.2.13.14 (A11:2009)	Add as new SNC: In Norway and Sweden , for requirements see 1.7.2.1 and 7.3 of this annex.	N
1.5.7.1 (A11:2009)	Replace the existing SNC by the following: In Finland, Norway and Sweden , resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.1. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.	N
1.5.8	In Norway , due to the IT power system used (see annex V, Figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).	N
1.5.9.4	In Finland, Norway and Sweden , the third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.	N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.1 (A2: 2013)	<p>In Denmark, Finland, Norway and Sweden, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In Denmark: "Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord."</p> <p>In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"</p> <p>In Norway: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In Sweden: "Apparaten skall anslutas till jordat uttag"</p>		N
1.7.5 (A2: 2013)	<p>In Denmark, socket-outlets for providing power to other equipment shall be in accordance with the DS 60884-2-D1:2011.</p> <p>For class I equipment the following Standard Sheets are applicable: DK 1-3a, DK 1-1c, DK 1-1d, DK 1-5a or DK 1-7a, with the exception for STATIONARY EQUIPMENT where the socket-outlets shall be in accordance with Standard Sheet DK 1-1b, DK 1-1c, DK 1-1d or DK 1-5a.</p> <p>Socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance with DS 60884-2-D1 standard sheet DKA 1-4a. Other current rating socket outlets shall be in compliance with by DS 60884-2-D1 Standard Sheet DKA 1-3a or DKA 1-3b.</p> <p>Justification the Heavy Current Regulations, 6c</p>		N
2.2.4	In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N
2.3.2	In Finland, Norway and Sweden there are additional requirements for the insulation. See 6.1.2.1 and 6.1.2.2 of this annex.		N
2.3.4	In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N
2.6.3.3	In the United Kingdom , the current rating of the circuit shall be taken as 13 A, not 16 A.		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.7.1	In the United Kingdom , to protect against excessive currents and short-circuits in the PRIMARY CIRCUIT of DIRECT PLUG-IN EQUIPMENT, tests according to 5.3 shall be conducted, using an external protective device rated 30 A or 32 A. If these tests fail, suitable protective devices shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT, so that the requirements of 5.3 are met.		N
2.10.5.13	In Finland, Norway and Sweden , there are additional requirements for the insulation, see 6.1.2.1 and 6.1.2.2 of this annex.		N
3.2.1.1	<p>In Switzerland, supply cords of equipment having a RATED CURRENT not exceeding 10 A shall be provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets:</p> <p>SEV 6532-2.1991 Plug Type 15 3P+N+PE 250/400 V, 10 A SEV 6533-2.1991 Plug Type 11 L+N 250 V, 10 A SEV 6534-2.1991 Plug Type 12 L+N+PE 250 V, 10 A</p> <p>In general, EN 60309 applies for plugs for currents exceeding 10 A. However, a 16 A plug and socket-outlet system is being introduced in Switzerland, the plugs of which are according to the following dimension sheets, published in February 1998:</p> <p>SEV 5932-2.1998 Plug Type 25 3L+N+PE 230/400 V, 16 A SEV 5933-2.1998 Plug Type 21 L+N 250 V, 16 A SEV 5934-2.1998 Plug Type 23 L+N+PE 250 V, 16 A</p>		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1 (A2: 2013)	<p>In Denmark, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Justification the Heavy Current Regulations, 6c</p>		N
3.2.1.1	<p>In Spain, supply cords of single-phase equipment having a rated current not exceeding 10 A shall be provided with a plug according to UNE 20315:1994.</p> <p>Supply cords of single-phase equipment having a rated current not exceeding 2,5 A shall be provided with a plug according to UNE-EN 50075:1993.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules, shall be provided with a plug in accordance with standard UNE 20315:1994.</p> <p>If poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with UNE-EN 60309-2.</p>		N
3.2.1.1	<p>In the United Kingdom, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a 'standard plug' in accordance with Statutory Instrument 1768:1994 - The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those regulations.</p> <p>NOTE 'Standard plug' is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1	In Ireland , apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to I.S. 411 by means of that flexible cable or cord and plug, shall be fitted with a 13 A plug in accordance with Statutory Instrument 525:1997 - National Standards Authority of Ireland (section 28) (13 A Plugs and Conversion Adaptors for Domestic Use) Regulations 1997.		N
3.2.4	In Switzerland , for requirements see 3.2.1.1 of this annex.		N
3.2.5.1	In the United Kingdom , a power supply cord with conductor of 1,25 mm ² is allowed for equipment with a rated current over 10 A and up to and including 13 A.		N
3.3.4	In the United Kingdom , the range of conductor sizes of flexible cords to be accepted by terminals for equipment with a RATED CURRENT of over 10 A up to and including 13 A is: • 1,25 mm ² to 1,5 mm ² nominal cross-sectional area.		N
4.3.6	In the United Kingdom , the torque test is performed using a socket outlet complying with BS 1363 part 1:1995, including Amendment 1:1997 and Amendment 2:2003 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N
4.3.6	In Ireland , DIRECT PLUG-IN EQUIPMENT is known as plug similar devices. Such devices shall comply with Statutory Instrument 526:1997 - National Standards Authority of Ireland (Section 28) (Electrical plugs, plug similar devices and sockets for domestic use) Regulations, 1997.		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.1.7.1	<p>In Finland, Norway and Sweden TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for the following equipment:</p> <ul style="list-style-type: none"> • STATIONARY PLUGGABLE EQUIPMENT TYPE A that <ul style="list-style-type: none"> ◦ is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and ◦ has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and ◦ is provided with instructions for the installation of that conductor by a SERVICE PERSON; • STATIONARY PLUGGABLE EQUIPMENT TYPE B; • STATIONARY PERMANENTLY CONNECTED EQUIPMENT. 		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.1.2.1 (A1:2010)	<p>In Finland, Norway and Sweden, add the following text between the first and second paragraph of the compliance clause:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>Alternatively for components, there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b).</p> <p>It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 60384-14; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14. 		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.1.2.2	In Finland, Norway and Sweden , the exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.		N
7.2	In Finland, Norway and Sweden , for requirements see 6.1.2.1 and 6.1.2.2 of this annex. The term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.		N
7.3 (A11:2009)	Delete the existing SNC for Norway and Sweden (based on NOTE 1 of IEC 60950-1:2005 + corr. 1). Add as new SNC (based on future NOTE 3 of IEC 60950-1:200X): In Norway and Sweden , for requirements see 1.2.13.14 and 1.7.2.1 of this annex.		N
7.3	In Norway , for installation conditions see EN 60728-11:2005.		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
ZC	<p>A-deviations</p> <p>A-deviation: National deviation due to regulations, the alteration of which is for the time being outside the competence of the CENELEC national member.</p> <p>This European Standard falls under Directives RTTED (1999/5/EC) and LVD (2006/95/EC).</p> <p>NOTE (from CEN/CENELEC IR Part 2:2002 , 2.17) Where standards fall under EC Directives, it is the view of the Commission of the European Communities (OJ No C 59, 1982-03-09) that the effect of the decision of the Court of Justice in case 815/79 Cremonini/Vrankovich (European Court Reports 1980, p. 3583) is that compliance with A-deviations is no longer mandatory and that the free movement of products complying with such a standard should not be restricted except under the safeguard procedure provided for in the relevant Directive.</p> <p>A-deviations in an EFTA-country are valid instead of the relevant provisions of the European Standard in that country until they have been removed.</p>		N
1.5.1	<p>Switzerland (Ordinance on environmentally hazardous substances SR 814.081, Annex 1.7, Mercury - Annex 1.7 of SR 814.81 applies for mercury.)</p> <p>Add the following:</p> <p>NOTE In Switzerland, switches containing mercury such as thermostats, relays and level controllers are not allowed.</p>		N
1.7.2.1	<p>Germany (Gesetz über technische Arbeitsmittel und Verbraucherprodukte (Geräte- und Produktsicherheitsgesetz – GPSG) [Law on technical labour equipment and consumer products], of 6th January 2004, Section 2, Article 4, Clause (4), Item 2).</p> <p>If for the assurance of safety and health certain rules during use, amending or maintenance of a technical labour equipment or readymade consumer product are to be followed, a manual in German language has to be delivered when placing the product on the market.</p> <p>Of this requirement, rules for use even only by SERVICE PERSONS are not exempted.</p>		N
1.7.13	<p>Switzerland (Ordinance on chemical hazardous risk reduction SR 814.81, Annex 2.15 Batteries)</p> <p>Annex 2.15 of SR 814.81 applies for batteries.</p>		N
(A12:2011)	Zx. Protection against excessive sound pressure from personal music players		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>Zx.1 General</p> <p>This sub-clause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. It also specifies requirements for earphones and headphones intended for use with personal music players.</p> <p>A personal music player is a portable equipment for personal use, that:</p> <ul style="list-style-type: none"> - is designed to allow the user to listen to recorded or broadcast sound or video; and - primarily uses headphones or earphones that can be worn in or on or around the ears; and - allows the user to walk around while in use. <p>NOTE 1 Examples are hand-held or body-worn portable CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment.</p> <p>A personal music player and earphones or headphones intended to be used with personal music players shall comply with the requirements of this sub-clause.</p> <p>The requirements in this sub-clause are valid for music or video mode only.</p> <p>The requirements do not apply:</p> <ul style="list-style-type: none"> - while the personal music player is connected to an external amplifier; or - while the headphones or earphones are not used. <p>NOTE 2 An external amplifier is an amplifier which is not part of the personal music player or the listening device, but which is intended to play the music as a standalone music player.</p> <p>The requirements do not apply to:</p> <ul style="list-style-type: none"> - hearing aid equipment and professional equipment; <p>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p>		N


EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>- analogue personal music players (personal music players without any kind of digital processing of the sound signal) that are brought to the market before the end of 2015</p> <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <p>For equipment which is clearly designed or intended for use by young children, the limits of EN 71-1 apply.</p>		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>Zx.2 Equipment requirements</p> <p>No safety provision is required for equipment that complies with the following:</p> <ul style="list-style-type: none"> - equipment provided as a package (personal music player with its listening device), where the acoustic output $L_{Aeq,T}$ is ≤ 85 dBA measured while playing the fixed "programme simulation noise" as described in EN 50332-1; and - a personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is ≤ 27 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" as described in EN 50332-1. <p>NOTE 1 Wherever the term acoustic output is used in this clause, the 30 s A-weighted equivalent sound pressure level $L_{Aeq,T}$ is meant. See also Zx.5 and Annex Zx.</p> <p>All other equipment shall:</p> <ul style="list-style-type: none"> a) protect the user from unintentional acoustic outputs exceeding those mentioned above; and b) have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time; and <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always required.</p>		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off.</p> <p>d) have a warning as specified in Zx.3; and</p> <p>e) not exceed the following:</p> <p>1) equipment provided as a package (player with its listening device), the acoustic output shall be ≤ 100 dBA measured while playing the fixed "programme simulation noise" described in EN 50332-1; and</p> <p>2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be ≤ 150 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" described in EN 50332-1.</p> <p>For music where the average sound pressure (long term $L_{Aeq,T}$) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. In this case T becomes the duration of the song.</p> <p>NOTE 4 Classical music typically has an average sound pressure (long term $L_{Aeq,T}$) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA.</p> <p>For example, if the player is set with the programme simulation noise to 85 dBA, but the average music level of the song is only 65 dBA, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dBA.</p>		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>Zx.3 Warning</p> <p>The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following:</p> <ul style="list-style-type: none"> - the symbol of Figure 1 with a minimum height of 5 mm; and - the following wording, or similar: <p>"To prevent possible hearing damage, do not listen at high volume levels for long periods."</p> <div data-bbox="520 741 802 1021" data-label="Image"> </div> <p>Figure 1 – Warning label (IEC 60417-6044)</p> <p>Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level.</p>		N
	Zx.4 Requirements for listening devices (headphones and earphones)		N
	<p>Zx.4.1 Wired listening devices with analogue input</p> <p>With 94 dBA sound pressure output $L_{Aeq,T}$, the input voltage of the fixed "programme simulation noise" described in EN 50332-2 shall be ≥ 75 mV.</p> <p>This requirement is applicable in any mode where the headphones can operate (active or passive), including any available setting (for example built-in volume level control).</p> <p>NOTE The values of 94 dBA - 75 mV correspond with 85dBA - 27 mV and 100 dBA - 150 mV.</p>		N


EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>Zx.4.2 Wired listening devices with digital input</p> <p>With any playing device playing the fixed "programme simulation noise" described in EN 50332-1 (and respecting the digital interface standards, where a digital interface standard exists that specifies the equivalent acoustic level), the acoustic output $L_{Aeq,T}$ of the listening device shall be ≤ 100 dBA.</p> <p>This requirement is applicable in any mode where the headphones can operate, including any available setting (for example built-in volume level control, additional sound feature like equalization, etc.).</p> <p>NOTE An example of a wired listening device with digital input is a USB headphone.</p>		N
	<p>Zx.4.3 Wireless listening devices</p> <p>In wireless mode:</p> <ul style="list-style-type: none"> - with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and - respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and - with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the above-mentioned programme simulation noise, <p>the acoustic output $L_{Aeq,T}$ of the listening device shall be ≤ 100 dBA.</p> <p>NOTE An example of a wireless listening device is a Bluetooth headphone.</p>		N
	<p>Zx.5 Measurement methods</p> <p>Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable. Unless stated otherwise, the time interval T shall be 30 s.</p> <p>NOTE Test method for wireless equipment provided without listening device should be defined.</p>		N

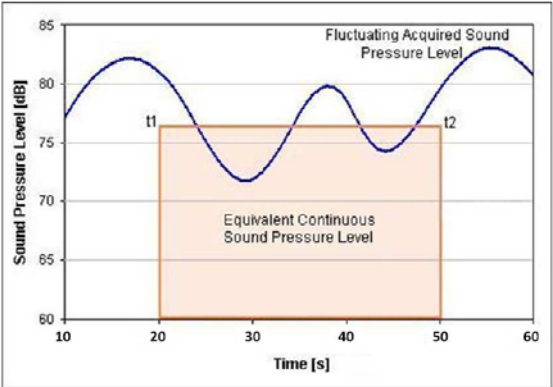EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
Annex Zx (A12:2011)	<p>Significance of $L_{Aeq,T}$ in EN 50332-1 and additional information</p> <p>$L_{Aeq,T}$ is derived from the general formula for equivalent sound pressure:</p> $L_{eq} = 10 \log \left[\frac{1}{t_2 - t_1} \int_{t_1}^{t_2} \frac{p_A^2}{p_0^2} dt \right]$ <p>This can be represented graphically as follows:</p>  <p>In EN 50332-1 the measurement time interval ($t_2 - t_1$) is 30 s.</p> <p>In practice, and for the purposes of listening to personal music player content, $L_{Aeq,T}$ has a time interval T ($t_2 - t_1$) in the order of minutes / hours and not seconds.</p> <p>6.5 (Limitation value) of EN 50332-1:2000 acknowledges this fact and states that the 100 dB limit equates to a long time average of 90 dB $L_{Aeq,T}$. By using the IEC 60268-1 "programme simulation noise" test signal, this also takes the spectral content into account.</p> <p>The SCENHIR¹ report states that 80 dBA is considered safe for an exposure time of 40 h/week. Most persons do not listen to 40 h/week to their personal music player. In addition, not all music tracks are at the same level of the simulated noise signal. Whilst modern music tends to be at around the same level, most of the available music is at a lower average level. Therefore, the working group² considers a value of 85 dBA to be safe for an overwhelming majority of the users of personal music players.</p>		N

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	¹ SCENIHR opinion of 23 Sept 2008: Potential health risks of exposure to noise from personal music players and mobile phones including a music playing function ² CENELEC TC108X/WG03		N

ZD	IEC and CENELEC code designations for flexible cords		N
	Type of flexible cord	Code designations	N
		IEC	CENELEC
	PVC insulated cords		
	Flat twin tinsel cord	60227 IEC 41	H03VH-Y
	Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F
	Ordinary polyvinyl chloride sheathed flexible cord	60227 IEC 53	H05VV-F H05VVH2-F
	Rubber insulated cords		
	Braided cord	60245 IEC 51	H03RT-F
	Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F
	Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F
	Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F
	Cords having high flexibility		
	Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H
	Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H
	Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.5.1	TABLE: List of critical components					P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾	
Adapter	QuanZhou PinXin Electronic Technology Co.,Ltd	CA-001	Input: 100-240V~ 50/60Hz 0.15A Max. Output: DC12.0V, 0.5A (LPS)	EN60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013	CTL Report No.:CTL1607192738-S	
Li-ion Battery	Harbin ZhongQiang Power- Tech Co., Ltd.	1A20KG-7	7.4V 2000mAh Max.charging current: 2000mA Max.discharging current: 2000mA	IEC 62133:2012	 Report No.:A001B20160627061	
Speaker	Quanzhou Qiangsheng Electron CO., Ltd	QP40M16-19-R	Rated: 16 Ohm±15% Power:1W, Max. 1.5W	EN60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013	Test with appliance	
PCB	Interchangeable	Interchangeable	Min.V-1, min.105°C	UL 796	UL	
Enclosure	SABIC INNOVATIVE PLASTICS B V	EXRL0246	V-1, 80°C, Min. thickness: 2.5mm	UL 94	UL E45329	

1) An asterisk indicates a mark which assures the agreed level of surveillance

Supplementary information:

1.5.1	TABLE: Opto Electronic Devices	N
Manufacturer.....	--	
Type	--	
Separately tested	N/A	
Bridging insulation.....	--	
External creepage distance	--	
Internal creepage distance	--	
Distance through insulation	--	
Tested under the following conditions	--	
Input	--	
Output	--	
Supplementary information:		

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.6.2	TABLE: Electrical data (in normal conditions)						P
U (V)	I (mA)	I _{rated} (A)	P (W)	Fuse #	I _{fuse} (A)	Condition/status	
90V 50Hz	126.0	--	6.40	--	--	Charging with empty battery	
90V 60Hz	126.0	--	6.40	--	--	Charging with empty battery	
100V 50Hz	117.0	0.15	6.31	--	--	Charging with empty battery	
100V 60Hz	117.0	0.15	6.31	--	--	Charging with empty battery	
240V 50Hz	82.6	0.15	6.19	--	--	Charging with empty battery	
240V 60Hz	82.6	0.15	6.19	--	--	Charging with empty battery	
254.4V 50Hz	81.8	--	6.18	--	--	Charging with empty battery	
254.4V 60Hz	81.8	--	6.18	--	--	Charging with empty battery	
Charging with adapter output							
12V	367	0.5	4.40			Charging with empty battery	
Discharging with fully baatery							
7.4V	1630	--	--	--	--	Max. normal working condition and discharging with fully battery	
Supplementary information:							

2.1.1.5 c) 1)	TABLE: max. V, A, VA test					P
Voltage (rated) (V)	Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)		
7.4	--	8.26	5.2	36.4		
supplementary information:						
Fully charged battery tested						

2.1.1.5 c) 2)	TABLE: stored energy			N
Capacitance C (μF)		Voltage U (V)	Energy E (J)	
--		--	--	
--		--	--	
supplementary information:				

2.1.1.7	TABLE: discharge test				N
Condition	τ calculated (s)	τ measured (s)	t _{u→0V}	Comments	
--	--	--	--	--	

EN 60950-1				
Clause	Requirement + Test		Result - Remark	Verdict
--	--	--	--	--
supplementary information:				

2.2	TABLE: evaluation of voltage limiting components in SELV circuits			N
Component (measured between)		max. voltage (V) (normal operation)		Voltage Limiting Components
		V peak	V d.c.	
--		--	--	--
--		--	--	--
Fault test performed on voltage limiting components		Voltage measured (V) in SELV circuits (V peak or V d.c.)		
--		--		
--		--		
supplementary information:				

2.4	TABLE: limited current circuit measurement				N
Location		Voltage (V)	Current (mA)	Comments	
--		--	--	--	
--		--	--	--	
supplementary information:					

2.5	TABLE: limited power sources				N
Circuit output tested: Battery pack					--
Measured Uoc (V) with all load circuits disconnected:					--
	Isc (A)		VA		
	Meas.	Limit	Meas.	Limit	
Normal condition	--	≤8	--	≤100	
--	--	≤8	--	≤100	
supplementary information:					

2.6.3.4 and 2.6.1	TABLE: ground continue test		N
Location	resistant measures (Ω)	comments	
--	--	--	

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

--	--	--	
supplementary information:			

2.10.2	Table: working voltage measurement			N
Location		RMS voltage (V)	Peak voltage (V)	Comments
--		--	--	--
--		--	--	--
supplementary information:				

2.10.3 and 2.10.4	TABLE: Clearance and creepage distance measurements						N
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
Functional:							
--	--	--	--	--	--	--	
--	--	--	--	--	--	--	
Basic/supplementary:							
--	--	--	--	--	--	--	
--	--	--	--	--	--	--	
Reinforced:							
--	--	--	--	--	--	--	
--	--	--	--	--	--	--	
Supplementary information:							


2.10.5	TABLE: Distance through insulation measurements					N
Distance through insulation (DTI) at/of:	U peak (V)	U rms (V)	Test voltage (V)	Required DTI (mm)	DTI (mm)	
--	--	--	--	--	--	
--	--	--	--	--	--	
Supplementary information:						

4.3.8	TABLE: Batteries		P
The tests of 4.3.8 are applicable only when appropriate battery data is not available		--	P
Is it possible to install the battery in a reverse polarity position?		It is impossible to install the	P

EN 60950-1									
Clause	Requirement + Test					Result - Remark		Verdict	
						battery in a reverse polarity position due to the design of the battery.			
	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. current(mA)	Manuf. Specs(mA).		Meas. Current(mA)	Manuf. Specs(mA).	Meas. current(mA)	Manuf. Specs. (mA)	Meas. current(mA)	Manuf. Specs(mA).
Max. current during normal condition	---	---	--	466	2000	1630	2000	--	--
Max. current during fault condition	---	---	--	512	2000	1750	2000	--	--
Test results:									Verdict
- Chemical leaks						No chemical leaks affecting required insulation.			P
- Explosion of the battery						No explosion.			P
- Emission of flame or expulsion of molten metal						No emission of flame or expulsion of molten metal.			P
- Electric strength tests of equipment after completion of tests									N
Supplementary information:									

4.3.8	TABLE: Batteries	P
Battery category.....: Lithium Ion battery		
Manufacturer.....: See table 1.5.1		
Type / model.....: See table 1.5.1		
Voltage.....: See table 1.5.1		
Capacity.....: See table 1.5.1		
Tested and Certified by (incl. Ref. No.).....: See table 1.5.1		
Circuit protection diagram: See below		

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

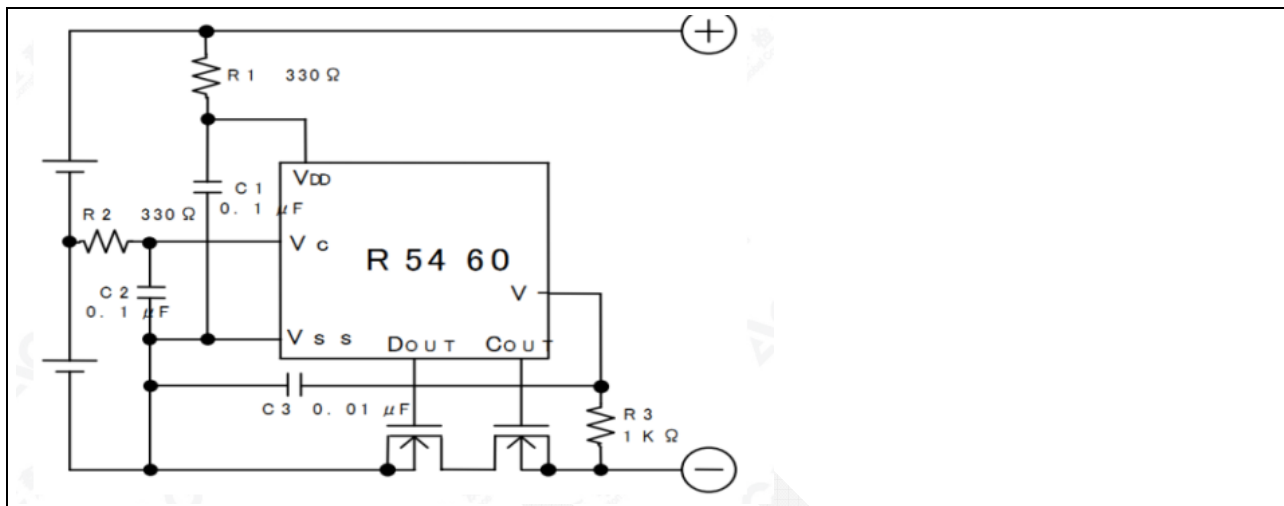

MARKINGS AND INSTRUCTIONS (1.7.13)	
Location of replaceable battery	In operator access areas
Language(s)	English
Close to the battery	Yes
In the servicing instructions	Yes
In the operating instructions	Yes

4.5	TABLE: Thermal requirements					P
	Supply voltage (V)	254.4V 60Hz Charging with adapter and charger base		7.4V battery discharging		—
	Ambient T _{min} (°C)	24.7	Shift to 40	29.2	Shift to 45	—
	Ambient T _{max} (°C)	25.5		29.2		—
Maximum measured temperature T of part/at::		T (°C)				Allowe d Tmax (°C)
Ambient		24.7	40.0	29.2	45.0	--
Adapter enclosure		45.1	60.4	--	--	95
C1 body of changer base PCB		37.3	52.6	--	--	105
Top of plastic enclosure of changer base		29.5	44.8	--	--	80
Bottom of plastic enclosure of changer base		35.3	50.6	--	--	80
Battery body		28.5	43.8	74.6	90.4	Ref.
U1 of PCB1		27.9	43.2	76.9	92.7	105
U2 of PCB1		28.8	44.1	75.3	91.1	105

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

U3 of PCB2	27.7	43.0	78.0	93.8	105
Key of PTT	26.8	42.1	54.4	70.2	75
Screen	26.6	41.9	52.4	68.2	70
Internal surface of plastic near speaker	27.6	42.9	62.1	77.9	80
Key of "5"	29.1	44.4	45.2	61.0	75
Bottom of plastic enclosure	27.7	43.0	56.4	72.2	75
Side of plastic enclosure	27.2	42.5	58.9	74.7	75

Supplementary information:

Temperature T of winding:	t ₁ (°C)	R ₁ (Ω)	t ₂ (°C)	R ₂ (Ω)	T (°C)	Allowed T _{max} (°C)	Insulation class
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Supplementary information:

4.5.5	TABLE: Ball pressure test of thermoplastic parts			N
	Allowed impression diameter (mm)	≤ 2 mm		—
Part	Test temperature (°C)		Impression diameter (mm)	
--	--		--	

Supplementary information:

4.6	TABLE: Openings in enclosures			N
Location	dimensions	Comments		

Supplementary information:

4.7	TABLE: Resistance to fire					P
Part	Manufacturer of material	Type of material	Thickness (mm)	Flammability class	Evidence	

Supplementary information: See appended table 1.5.1

5.1	TABLE: touch current measurement	N
------------	---	---

EN 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
Measured between:	Measured (mA)	Limit (mA)	Comments/conditions
--	--	--	--
--	--	--	--
supplementary information:			
See table 1.5.1			

5.2	TABLE: Electric strength tests, impulse tests and voltage surge tests			N
Test voltage applied between:		Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
Functional:				
--		--	--	--
Basic/supplementary:				
--		--	--	--
Reinforced:				
--		--	--	--
Supplementary information:				

5.3	TABLE: Fault condition tests					P
Ambient temperature (°C)		26.2				—
Power source for EUT: Manufacturer, model/type, output rating		See appended table 1.5.1				—
Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
Speaker	S-C	7.4Vdc	3hrs	--	--	Speaker shutdown immediately, NCD, NFG, NHT, Recoerable
Battery	Output S-C	7.4Vdc	10mins	--	--	battery is not damaged, no explosion, no chemical leaks, no emission of flame or explosion of molten metal.
Battery pack	Over charge	12Vdc	7h	--	--	battery is not damaged, no explosion, no chemical leaks, no emission of flame or explosion of molten metal.
Battery pack	U1 Pin1 - Pin2 S-C	12Vdc	7h	--	--	battery is not damaged, no explosion, no chemical leaks, no emission of flame or explosion of molten metal.

EN 60950-1						
Clause	Requirement + Test			Result - Remark		Verdict
Battery pack	Over discharge	7.4Vdc	7h	--	--	battery is not damaged, no explosion, no chemical leaks, no emission of flame or explosion of molten metal.
Battery pack	U1 Pin1 - Pin2 S-C	7.4Vdc	7h	--	--	battery is not damaged, no explosion, no chemical leaks, no emission of flame or explosion of molten metal.
R10	S-C	7.4Vdc	30mins	--	--	EUT normally work, no hazards
C101	S-C	7.4Vdc	30mins	--	--	EUT shut down, recoverable, no hazards
Supplementary information:						
NHT: No High Temperature; NCD: No Component Damage; NFG No flammability gas; S-C: Short-circuited						

C.2	TABLE: transformers							N
Loc.	Tested insulation	Working voltage peak / V (2.10.2)	Working voltage rms / V (2.10.2)	Required electric strength (5.2)	Required clearance / mm (2.10.3)	Required creepage distance / mm (2.10.4)	Required distance thr. insul. (2.10.5)	
--	--	--	--	--	--	--	--	
--	--	--	--	--	--	--	--	
Loc.	Tested insulation			Test voltage/ V	Measure d clearance / mm	Measured creepage dist./ mm	Measured distance thr. insul. / mm; number of layers	
--	--			--	--	--	--	
--	--			--	--	--	--	
supplementary information:								

Appendix A - EUT PHOTOS

General view



EUT top view



EUT bottom view



EUT uncover view1



EUT uncover view2




Battery top view




Battery bottom view




Top view of PCB1

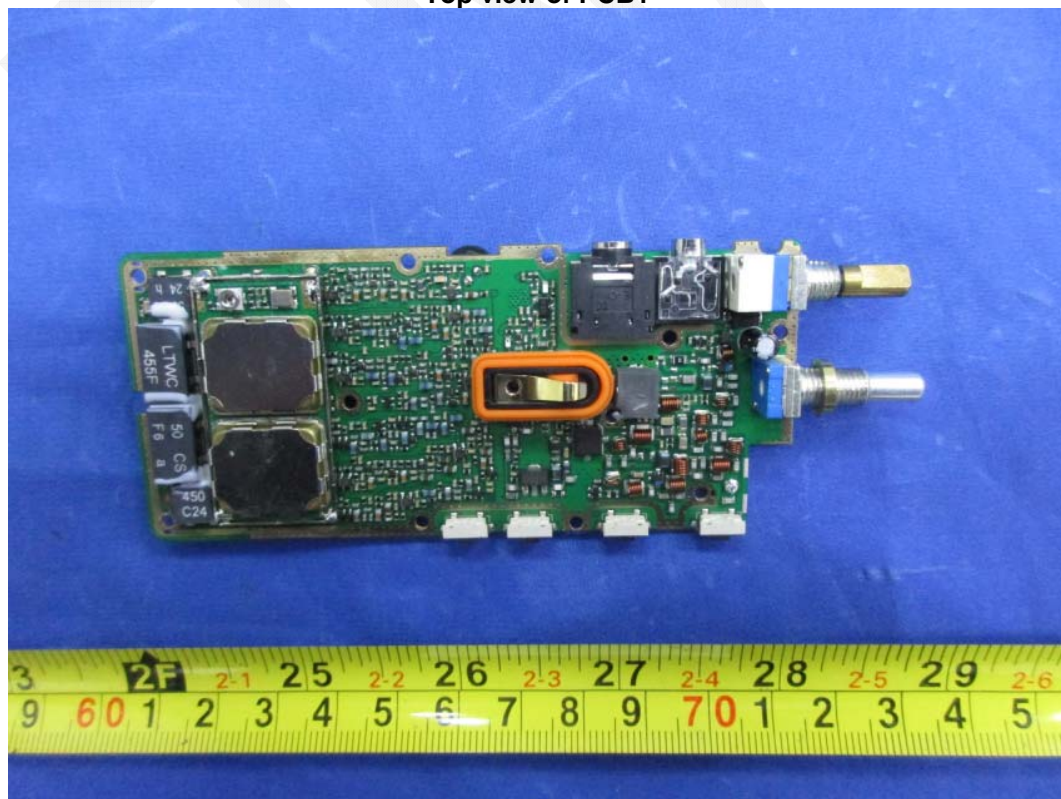

Bottom view of PCB1

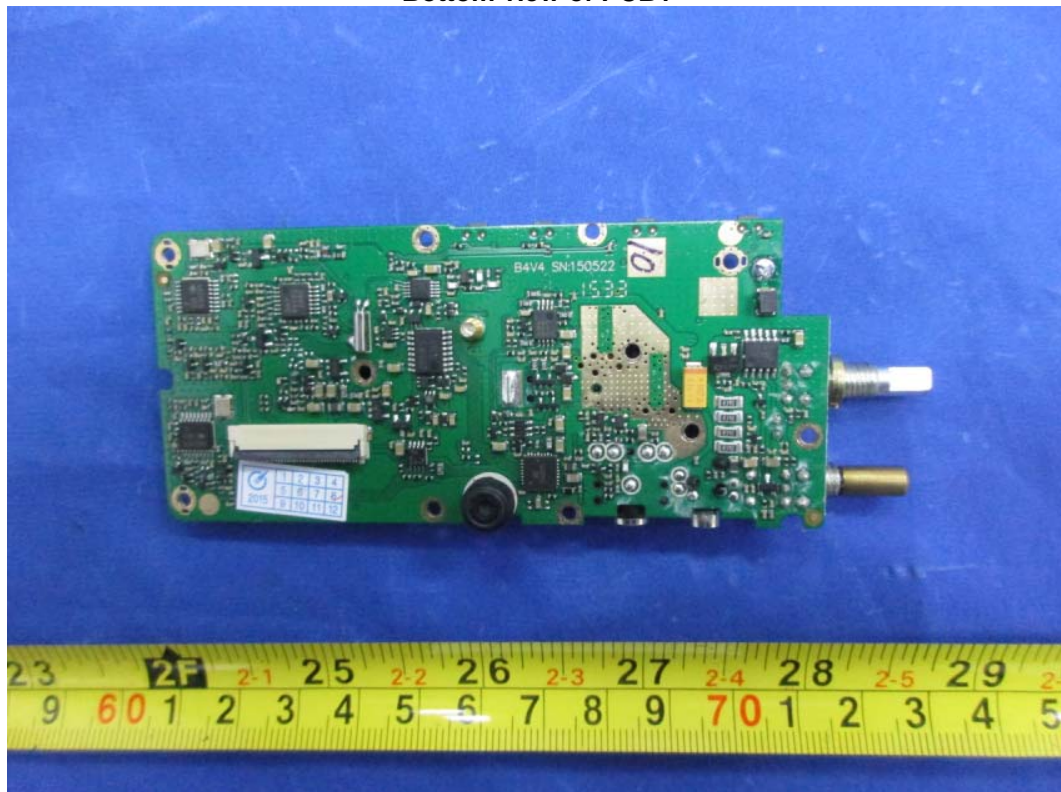

Top view of PCB2

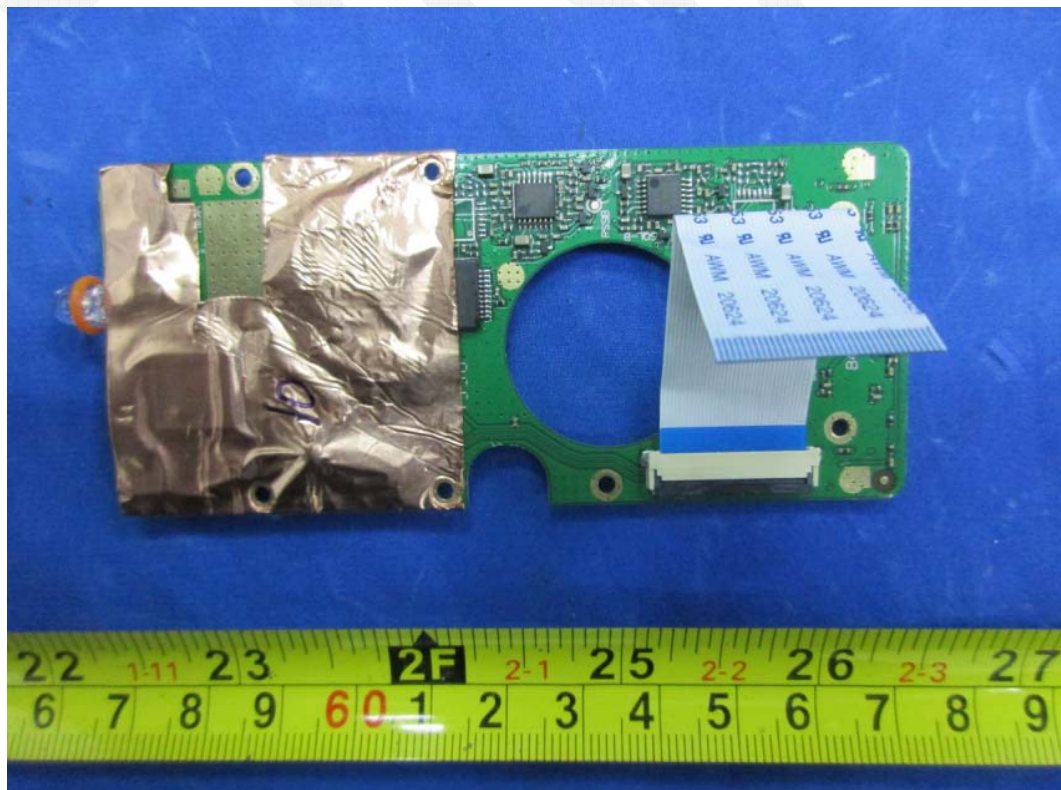

Bottom view of PCB2



Charger base top view



Charger base bottom view




Charger base uncover view



Top PCB view of charger base




Bottom PCB view of charger base

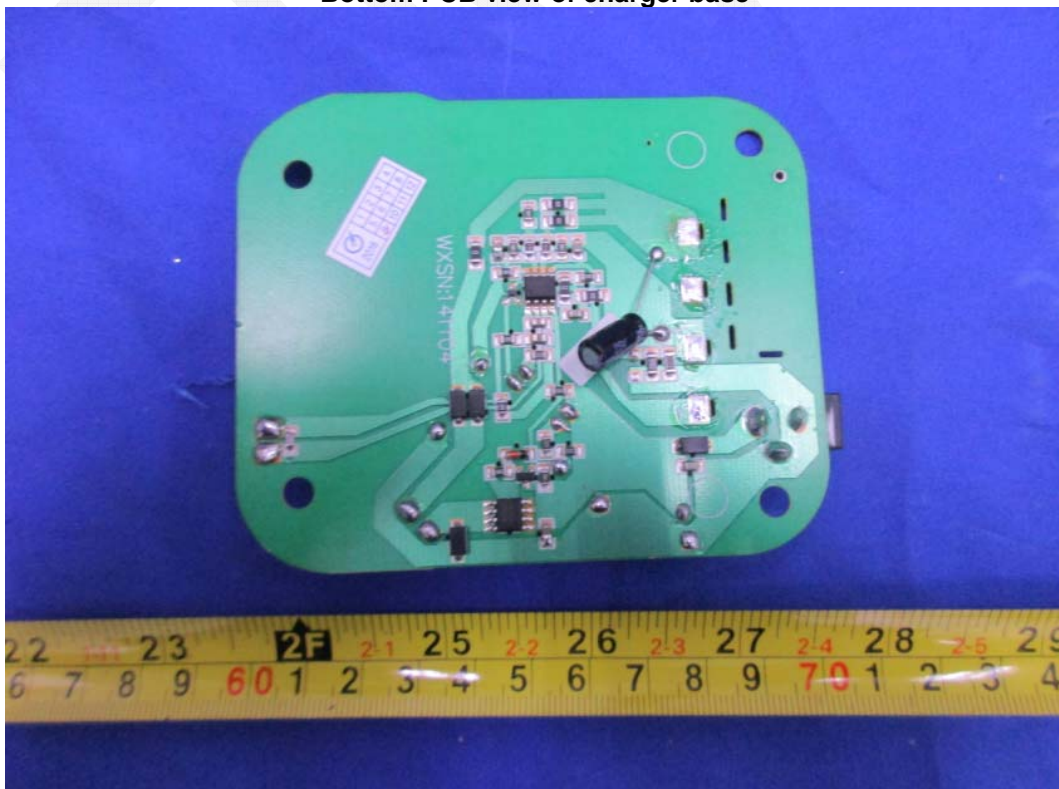

Adapter view



APPENDIX B – EN 62471 Data

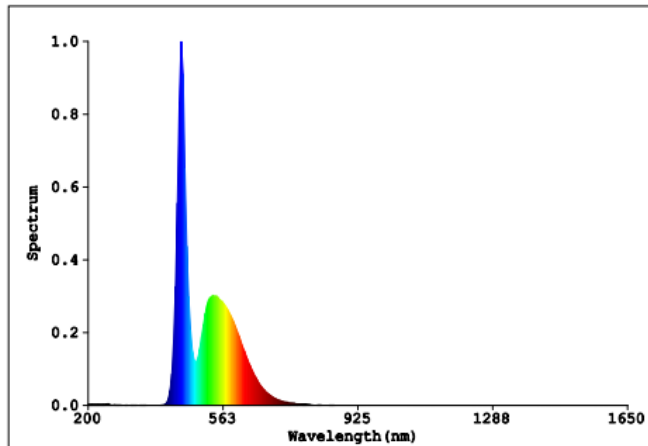

LB RFOV (mrad)	Measured (W/m2/sr)	Limit (W/m2/sr)
100(Exempt Risk Group)	2.05e+02	1.0e+02
11(Risk Group 1)	5.65e+03	1.0e+04
1.7(Risk Group 2)	6.91e+03	4.0e+06
LR RFOV (mrad)	Measured (W/m2/sr)	Limit (W/m2/sr)
11(Exempt Risk Group)	6.3e+04	2.4e+06
11(Risk Group 1)	6.3e+04	2.4e+06
1.7(Risk Group 2)	7.7e+04	6.2e+06

Color Parameters:

Chromaticity Coordinate: $x=0.2638$ $y=0.2607$ $u'=0.1884$ $v'=0.4189$ $T_c=16467K$

Dominant WL: $L_d=476.1nm$ Peak WL: $L_p=450.0nm$ Purity=30.6% Red Ratio: $R=11.5\%$

Render Index: $R_a=79.2$ FWHM=30.0nm

$R1=81$ $R2=81$ $R3=74$ $R4=83$ $R5=80$ $R6=71$ $R7=87$
 $R8=76$ $R9=11$ $R10=49$ $R11=81$ $R12=42$ $R13=81$ $R14=86$ $R15=81$

Photo Parameters(CX Condition:Muti Test):

Distance = 200.0mm

Alpha = 0.0115rad

E = 761.4lx

$E_s = 8.5e-04 W/m^2$ $T_{max_Es} > 8h$

$E_b = 3.32e-01 W/m^2$ T_{max} is not needed

$E_{uva} = 2.3e-04 W/m^2$ $T_{max_Euva} > 1000s$

$E_{ir} = 0.0e+00 W/m^2$ $T_{max_Eir} > 1000s$

$E_h = 8.6e-01 W/m^2$ $T_{max_Eh} > 10s$

$LB = 5.65e+03 W/m^2/Sr$ $T_{max_LB} < 177s$

$LR = 6.3e+04 W/m^2/Sr$ $T_{max_LR} > 10s$

$L_{ir} = 1.3e+01 W/m^2/Sr$ (T_{max} is not needed)

Result:

Lamp Type: Risk Group 1

APPENDIX C – Adapter report



Shenzhen CTL Testing Technology Co., Ltd..
Tel: +86-755-89486194 Fax: +86-755-26636041

TEST REPORT	
EN 60950-1	
Information technology equipment – Safety –	
Part 1. General requirements	
Report reference No.	CTL1607192738-S
Original Report No.	CTL1411032640-S
Tested by (name + signature)	Bright Gao
Supervised by (name + signature) ..	Jacky Chen
Approved by (name + signature)	Tracy Qi
Date of issue	July 26, 2016
Testing Laboratory Name	Shenzhen CTL Testing Technology Co., Ltd..
Address	Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055
Applicant's Name	QuanZhou PinXin Electronic Technology Co., Ltd
Address	NO.28, Jiangnan Hi-tech Electronic Information Industrial Park, Quanzhou, CHINA
Test specification	
Standard	EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013
Test procedure	CE Attestation
Non-standard test method	N/A
Test Report Form No.	IECEN60950_1B
TRF originator	SGS Fimko Ltd
Master TRF	Dated 2010-04
Copyright © 2010 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
Test item description	AC ADAPTER
Trademark	N/A
Manufacturer	QuanZhou PinXin Electronic Technology Co., Ltd NO.28, Jiangnan Hi-tech Electronic Information Industrial Park, Quanzhou, CHINA
Model and/or type reference	CG-D180050XY GC-D050050XY GC-D050100XY GC-D060050XY GC-D060100XY GC-D090050XY GC-D120050XY CG-D150050XY CA-001 ("X" can be letter "Z, U, Y, M, A, H" "Y" can be number 0 to 99)
Ratings	Input: 100-240V~ 50/60Hz, 0.15A Output: 12V=, 500mA

Summary of testing:

Testing location:

Shenzhen CTL Testing Technology Co., Ltd..

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Tests performed (name of test and test clause):

Tests performed (name of test and test clause):

The sample(s) tested complies with the requirements of EN 60950-1.

These tests fulfil the requirements of standard ISO/IEC 17025.

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Unless otherwise specified, all tests were conducted under worst case and carried out at 90 V / 60 Hz and 264 V / 50 Hz.

Heating test (4.5):

T_{ma} = 40 °C (declared by manufacturer)

T_{amb}: 24.2 °C – 25.4 °C

T-type thermocouple used for temperature measurement.

This test report includes:

Annex 1: Photos.

Annex 2: EU Plug.

Summary of compliance with National Differences:

Compliance with the National requirements of CENELEC common modification.

Copy of marking plate:

AC ADAPTER
Model: CG-D120050XY
Input: 100-240V~, 50/60Hz, 0.15A
Output: 12V \square , 500mA
Manufacturer: QuanZhou PinXin Electronic
Technology Co., Ltd
NO.28, Jiangnan Hi-tech Electronic
Information Industrial Park, Quanzhou, China
Importer name: XXXXXXXXXXXXXXXXXXXX
Importer address: XXXXXXXXXXXXXXXXXXXX



Made in China

Remark: the marking plates of other models are in the same pattern.

The above marking are in the minimum requirements required by safety standard. For the final production sample, the marking which do not give rise to misunderstanding may be add.

General remarks:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(See Enclosure #)" refers to additional information appended to the report.

"(See appended table)" refers to a table appended to the report.

Note: This TRF includes EN Group Differences together with National Differences and Special National Conditions, if any. All Differences are located in the Appendix to the main body of this TRF.

This document is issued by the company under its General Conditions of Service accessible at www.ctl-lab.com. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated: (a) the results shown in this document refer only to the sample(s) tested and (b) such sample(s) are retained for 12 months. This document cannot be reproduced except in full, without prior approval of the company.

General product information:

The products are direct plug-in Class II switching mode power supply, external enclosure is of plastic material and enclosed with ultrasonic weld.

Model difference:

All models are no other difference except for model no. and Sec. circuit, Unless otherwise specified, tests carried out on model CG-D120050XX were considered representative.

Remark:

This test report is copied from previous test report Ref No.: CTL1411032640-S, with the following changes:

1. Change of Models;

APPENDIX D –Declaration of similarity



Quanzhou Wouxun Electronics Co., Ltd.

ADD: No.928 Nanhuan Road, Jiangnan High Technology Industry Park, Quanzhou, Fujian, China

TEL: 086-0595-28051265

FAX: 086-0595-28051267

Declaration of Similarity

(Current Date:2017-2-21)

To Whom it may Concern,

We Quanzhou Wouxun Electronics Co., Ltd., here declare that there are some differences between our multiple models and testing products. Details as below,

Products Description	Name	Two-Way Radio	
	Brand	WOUXUN	
	Manufacturer	Quanzhou Wouxun Electronics Co., Ltd	
Difference Description			
Testing Products	Multiple Models	Differences Items	Details
KG-UV9D	KG-UV1P, KG-UV2D, KG-UV3D, KG-UV5D, KG-UV6D, KG-UV6D V2, KG-UVA1, KG-UV8D, KG-UV8D(Plus), KG-UV9D(Plus), KG-UV8E, KG-UV66, KG-UV899, KG-UV8T, KG-UVN1, KG-UV8Q, KG-UV8H, KG-UV9T, KG-UV9P, KG-UV9K	Model names	All are the Same except Model names

Besides the differences in the table above, we declare the products are identical. We guarantee all the information provided above is true, and notice that we'll bear all the consequences caused by any false information or concealing.


Sincerely Yours,

Signature:

Typed or Printed Name: Danny chen

Title: manager

E-mail: wouxun@wouxun.com



APPENDIX C – TEST EQUIPMENTS LIST

Equipment Description	Model No.	Equipment No.	Manufacturer	Last Cal	Cal Due
AC POWER SUPPLY	HPC3145	T-08-SF191	N/A	2016-03-04	2017-03-03
Hybrid Recorder	DR240	T-08-SF007	YOKOGAWA	2016-03-04	2017-03-03
Hygrothermograph	VC230	T-08-QA036	Victor	2016-03-21	2017-03-21
Power meter	AN8721P	T-08-SF036	AINUO	2016-03-04	2017-03-03
Digital Multimeter	15B	T-08-SF072	FLUKE	2016-03-04	2017-03-03
Electric load	3710A	T-08-SF077	ITEK POWER	2016-03-04	2017-03-03
Push-pull Scale	SN-300	T-08-SF115	Shandu	2016-07-07	2017-07-07
Drop test board	FZ-1218	F-08-SF025	N/A	N/A	N/A
Steel tape	HILOCK-19	T-08-SF100	TAJIMA	2013-04-18	2018-04-17
Digital CC&CV DC Power Supply	WY305	T-08-EE098	EVERFINE	2016-03-04	2017-03-03
Digital Caliper	0-150mm	T-08-SF074	Guanglu	2016-03-04	2017-03-03

END OF REPORT