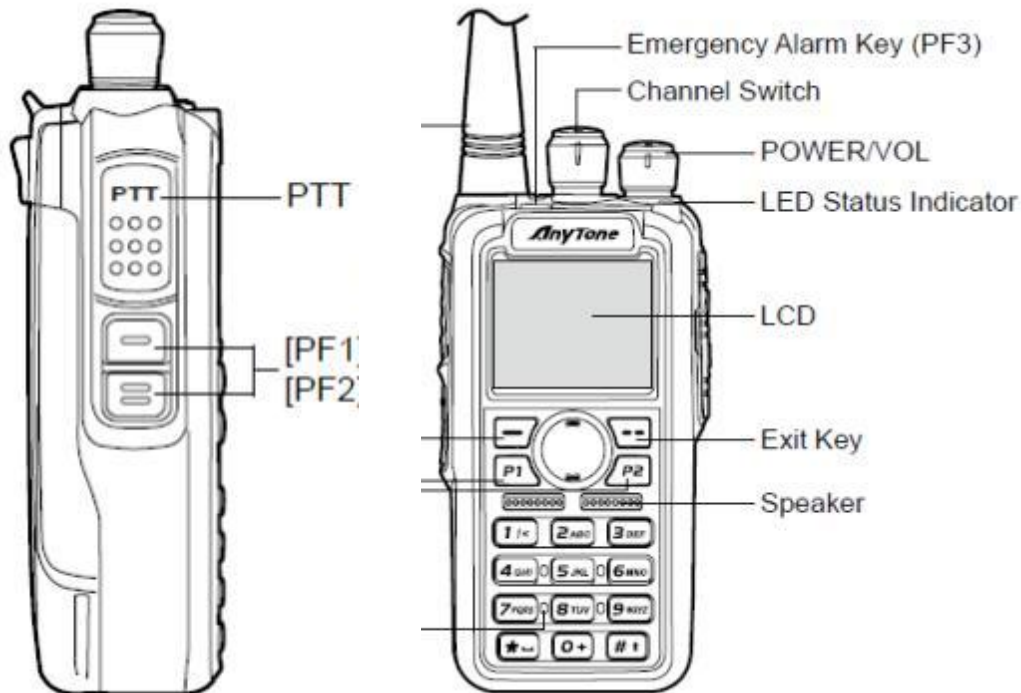




Noise Reduction Board FW: D890\_NR\_BOARD\_V1XX\_202XXXXX.ufw,  
improve the noise reduction effect.

1. Press and hold both top key (PF3) and side PF2 key, and power the radio ON, the radio display “**UPDATE MODE FOR LinkBoard**” should be seen on the LCD display



2. Run the **JL Bootloader.exe** program from the **JLUartUpdate** folder



3. Select the  button and select the appropriate **D890\_NR\_BOARD\_V1XX\_202XXXXX.ufw** file in the NR Board FW Update folder
4. Check and Set the **Com Port** that is correct for your PC connected to the radio as part of the small down arrow in the program above .
5. Select the **Write** button (Chinese in the big square above) to write the new FW to the radio. You should see the status in the big square above – wait till you see 100% and it is done. Then turn the radio OFF and back ON to get normal operation again.